



Features
<ul style="list-style-type: none"> <li>Robustly constructed</li> <li>Nickel plated solid brass actuator</li> <li>Electrical life 20,000 cycles</li> <li>Mechanical life 100,000 cycles</li> <li>Accessories included in bulk</li> </ul>

Applications
<ul style="list-style-type: none"> <li>Audio products</li> <li>Industry</li> <li>Medical</li> </ul>




**Part Numbering Guide**

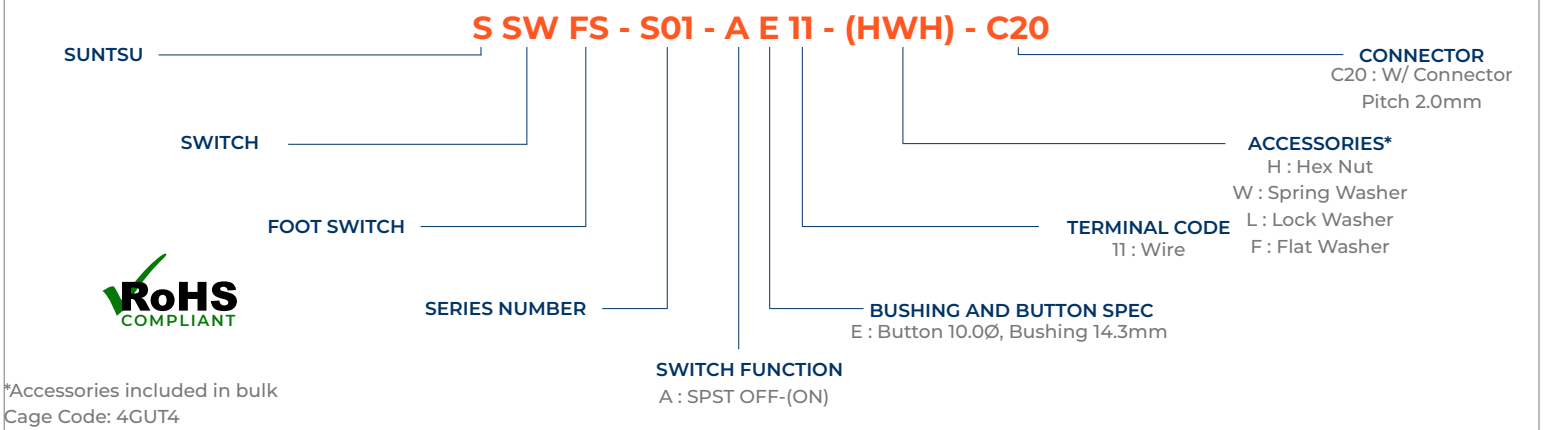

**Electrical and Material Parameters**


Rating	6A 125V AC, 3A 250VAC
Contact Resistance	50mΩ Max
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C ~ 65°C
Switch Function	2P SPST OFF-(ON), PUSH ON
Accessories	2 HEX Nut & 1 SPRING Washer in BULK
Frame	Black, PF
Materials Actuator	Ni-plated, Brass
Terminals	Silver plated, Copper Alloy

**Test Circuit & Mounting Hole**

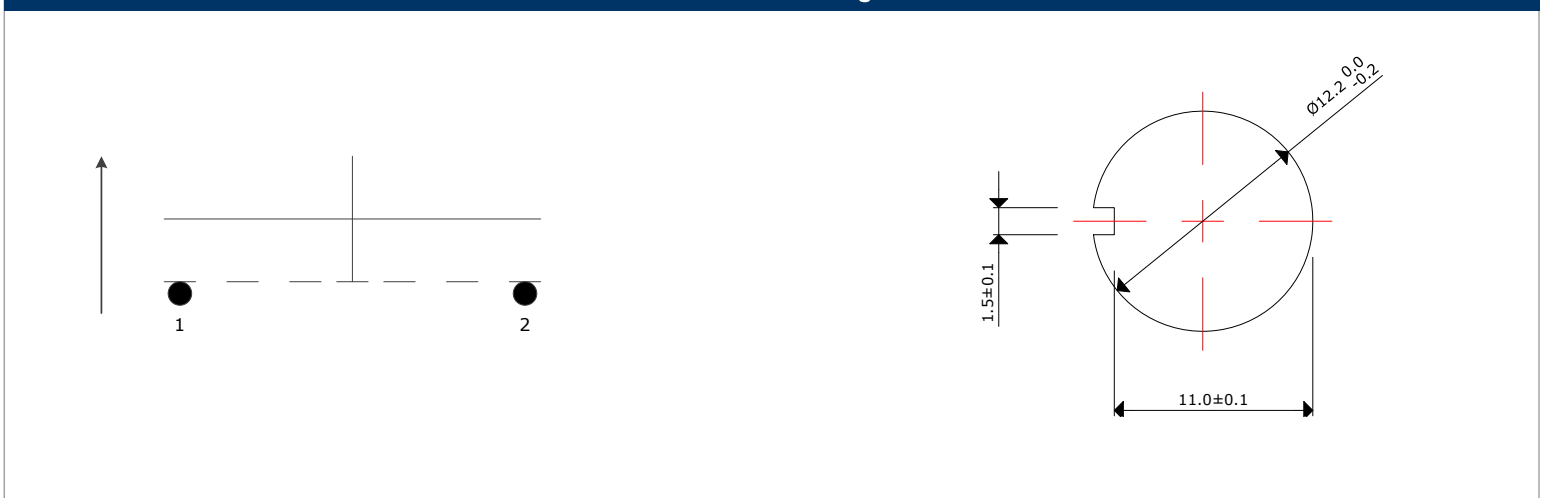

**Outline Drawing**

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

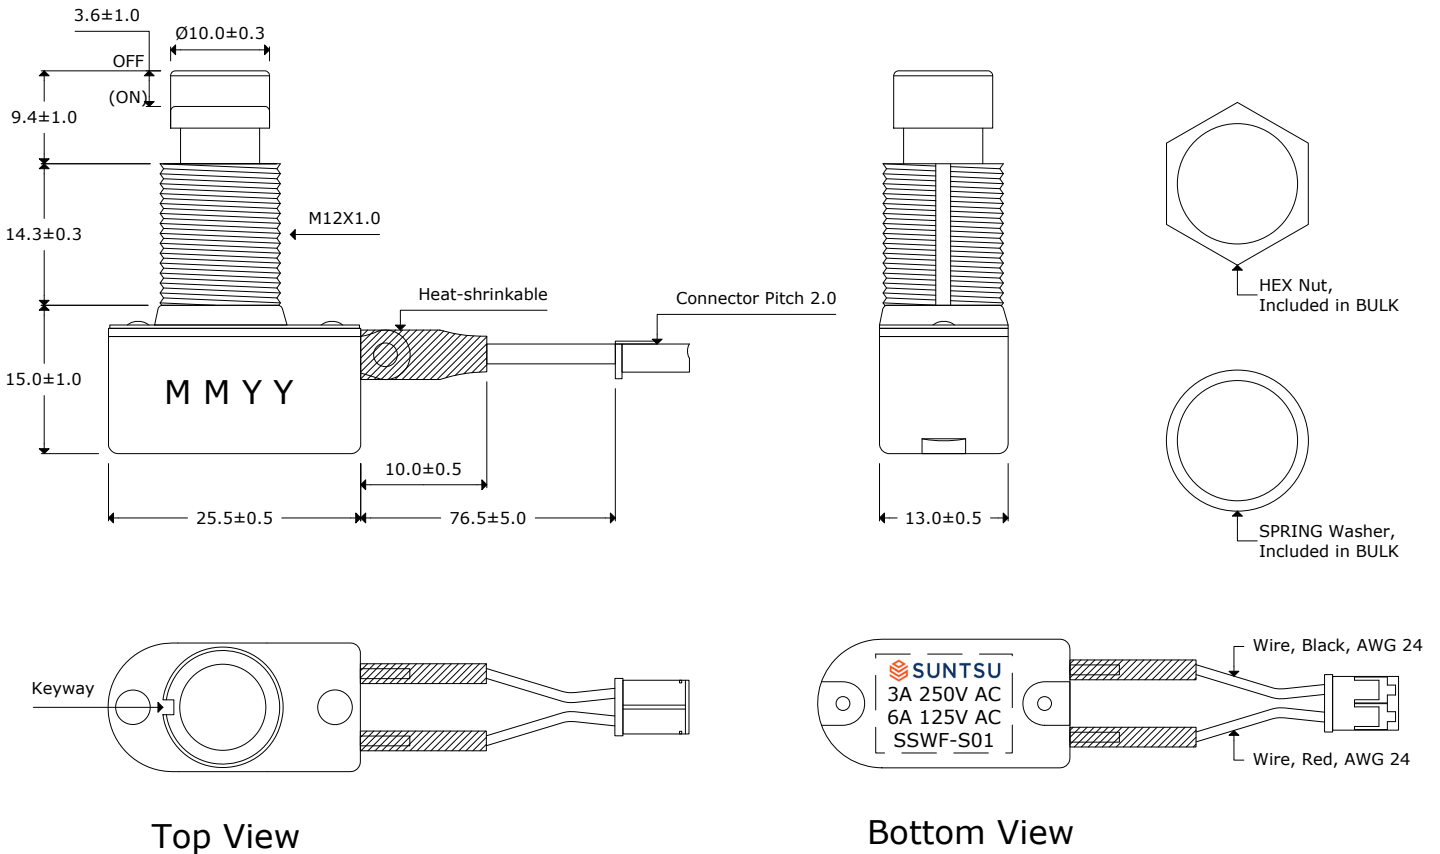

**Remarks:**

1. 500pcs per 1 master carton
2. Electrical life 20,000 cycles
3. Mechanical life 100,000 cycles