


Features
<ul style="list-style-type: none"> Robustly constructed Nickel plated solid brass actuator Electrical life 20,000 cycles Mechanical life 100,000 cycles

Applications
<ul style="list-style-type: none"> Audio products Industry Medical



Part Numbering Guide


S SW FS - S01 - A E 11 - HWH - C20

SUNTSU	SWITCH	FOOT SWITCH	SERIES NUMBER	SWITCH FUNCTION	BUSHING AND BUTTON SPEC	TERMINAL CODE	CONNECTOR	ACCESSORIES
				A : SPST OFF-(ON)	E : Button 10.0Ø, Bushing 14.3mm	11 : Wire	C20 : W/ Connector Pitch 2.0mm	H : Hex Nut W : Spring Washer L : Lock Washer F : Flat Washer

RoHS COMPLIANT


Cage Code: 4GUT4

Electrical and Material Parameters		
Rating		6A 125V AC, 3A 250VAC
Contact Resistance		50mΩ Max
Insulation Resistance		DC 500V 100MΩ Min.
Dielectric Strength		AC 1500V 1 minute
Operation Temperature		-20°C ~ 65°C
Switch Function		2P SPST OFF-(ON), PUSH ON
Accessories		2 HEX Nut & 1 SPRING Washer Assembly, Mate Connector in BULK
Frame		Black, PF
Materials	Actuator	Ni-plated, Brass
	Terminals	Silver plated, Copper Alloy

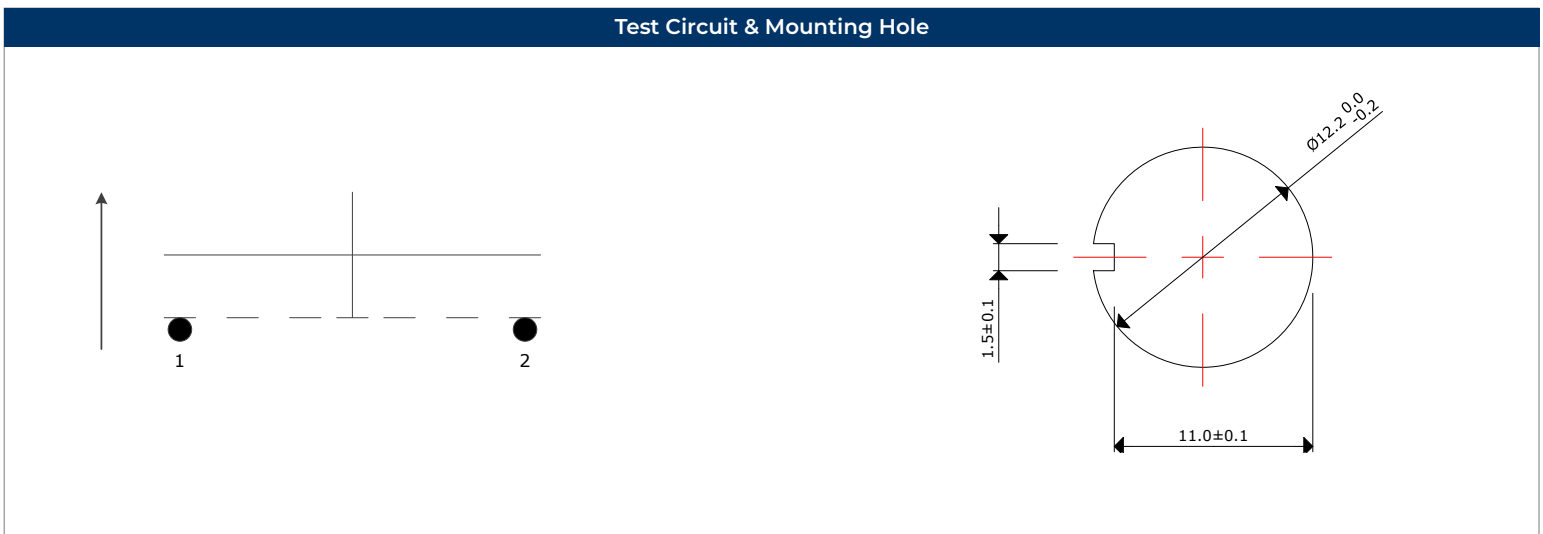

Outline Drawing

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

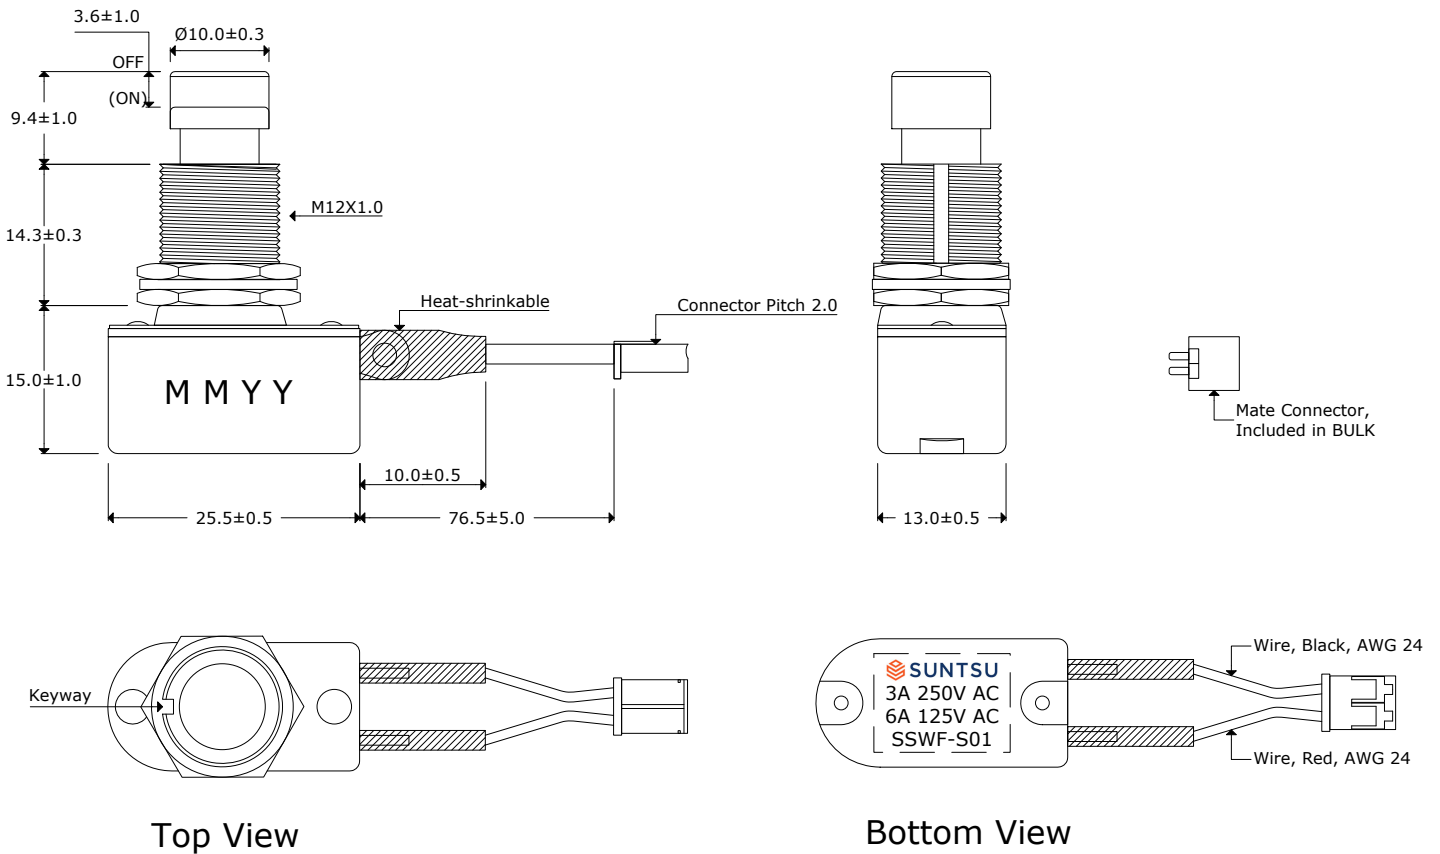

Remarks:

1. 500pcs per 1 master carton
2. Electrical life 20,000 cycles
3. Mechanical life 100,000 cycles