


Features
<ul style="list-style-type: none"> Robustly constructed Nickel plated solid brass actuator Electrical life 20,000 cycles Mechanical life 100,000 cycles

Applications
<ul style="list-style-type: none"> Audio products Industry Medical




Part Numbering Guide

S SW FS - S01 - A E 11 - HWH - C25

SUNTSU					CONNECTOR C25 : W/ Connector Pitch 2.5mm
SWITCH					ACCESSORIES H : Hex Nut W : Spring Washer L : Lock Washer F : Flat Washer
FOOT SWITCH				TERMINAL CODE 11 : Wire	
	SERIES NUMBER		BUSHING AND BUTTON SPEC E : Button 10.0Ø, Bushing 14.3mm		
		SWITCH FUNCTION A : SPST OFF-(ON)			


Cage Code: 4GUT4

Electrical and Material Parameters	
Rating	6A 125V AC, 3A 250VAC
Contact Resistance	50mΩ Max
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C ~ 65°C
Switch Function	2P SPST OFF-(ON), PUSH ON
Accessories	2 HEX Nut & 1 SPRING Washer Assembly, Mate Connector in BULK
Frame	Black, PF
Materials Actuator	Ni-plated, Brass
Terminals	Silver plated, Copper Alloy

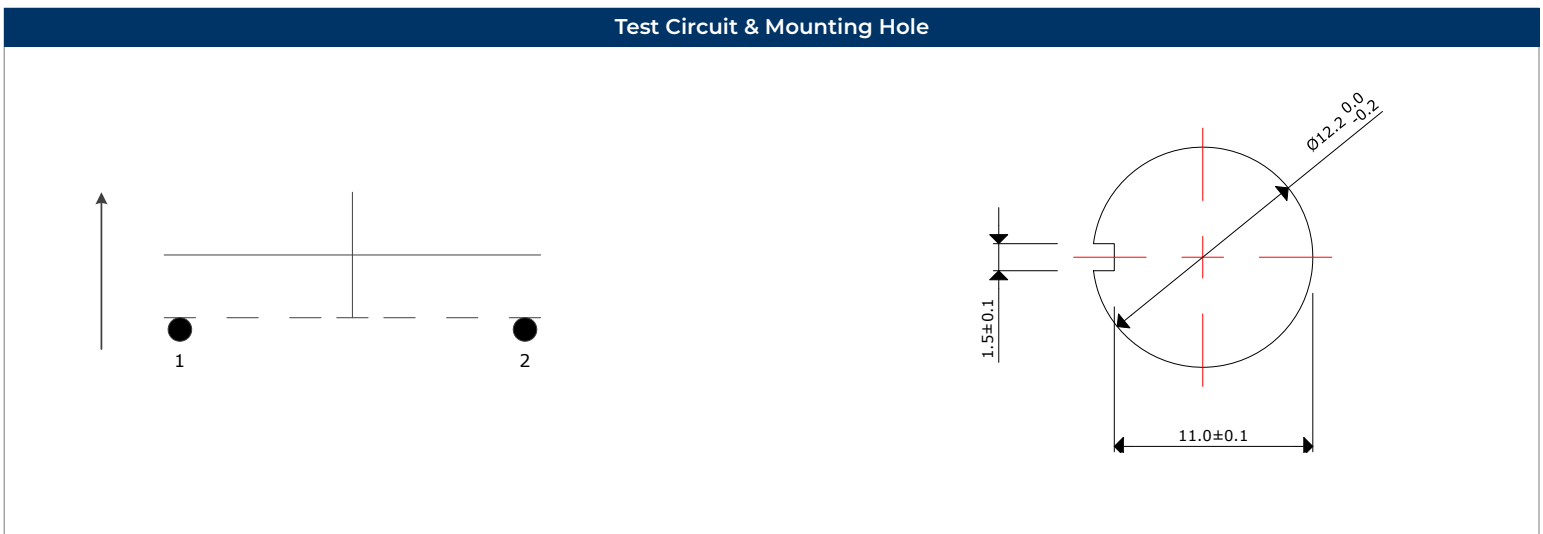

Outline Drawing

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

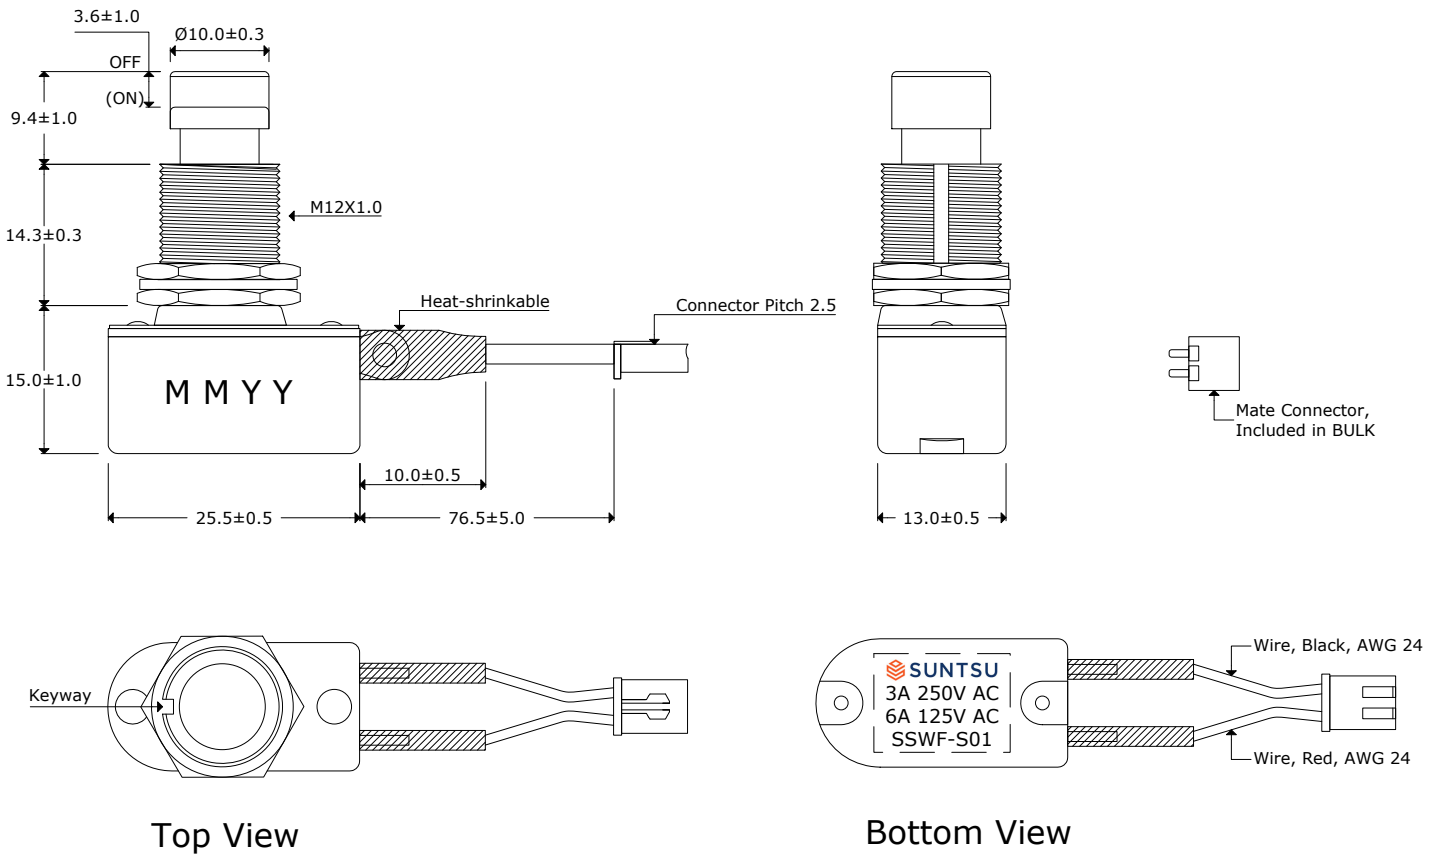

Remarks:

1. 500pcs per 1 master carton
2. Electrical life 20,000 cycles
3. Mechanical life 100,000 cycles