

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations.
除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留对涉及发明、实用新型或外观设计的所有权利。

FOR-1755 Rev. 2.1


2

3




4

5

6

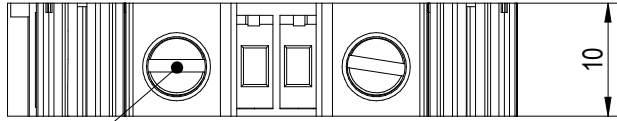

2

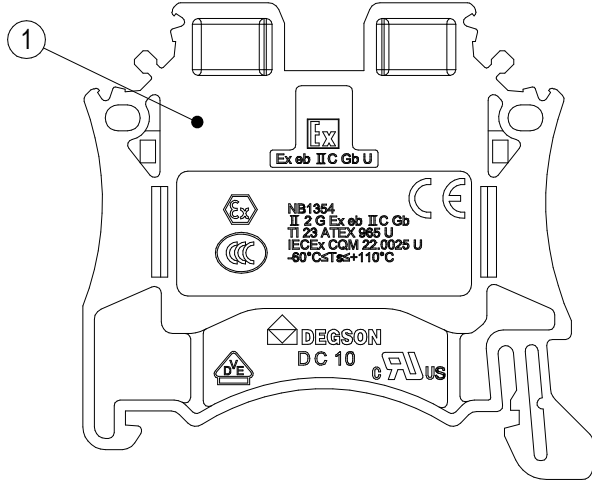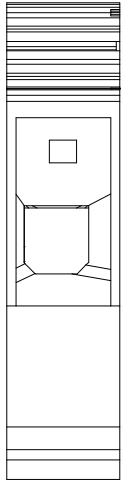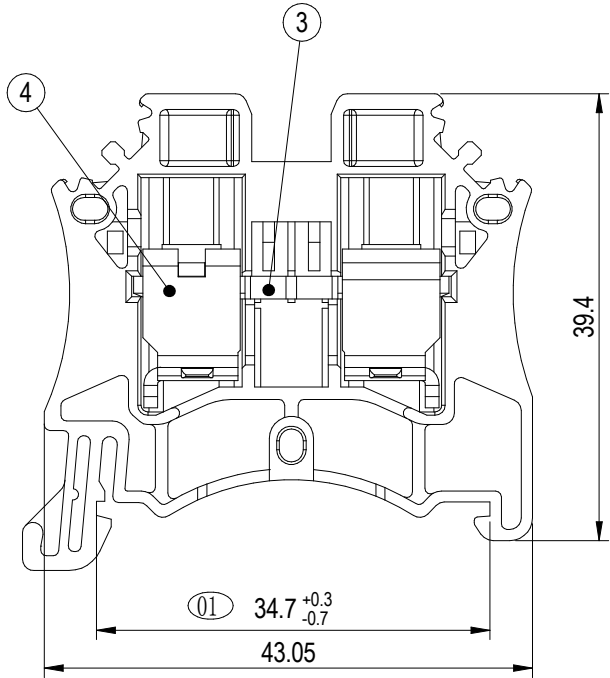

未注公差/General tolerances (mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
UL 标准/UL Standard:											B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)											600/65	600/65	600/5	
IEC 标准/IEC Standard:														
过压类别/Over voltage Category /污染等级 /Pollution Degree											III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)											1000/57	/	/	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											8	/	/	
螺丝扭矩/Torque Tightening(N· m/Lb.in)											M4, 1.54/14			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)											20~6 / 0.5~10			
间距/Pitch(mm)/线数范围/Poles											10.0/01P			
剥线长度/Stripping length(mm)											10~12			
使用温度范围/Operating temperature(°C)											-40~+105			
符合RoHS环保要求/Conform to RoHS											Yes			

4	Cage	Steel	Zn Plated
3	Current carrier	Copper	Sn plated
2	Screw	Steel	M4\Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
APPD: 李根芳		2024.10.25		MAT NO./REV: / 00	
CHKD: 马恩开		2024.10.25		MAT STATUS: 批量	
DRFT: 邓梁		2024.10.24		NAME	
REV		ECN		DC10-01P-11-00L (H)	
Update the view		邓梁		DRAWING NO.	
DESCRIPTION		DRFT		200309632	
DATE		DATE		TYPE	
A4		(inch)		CUSTOMER DRAWING	
				DRAWING STATUS	
				已发布	
				SCALE	
				1.5:1	
				SHEET	
				1/1	

01		Update the view	邓梁	2024.10.24
REV	ECN	DESCRIPTION	DRFT	DATE