

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利予以明确授权, 否则禁止上列设计、复制、分发、引用、交流本文件的内容。侵犯专利者将承担法律责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev. 1.6





2

3

4

5

6

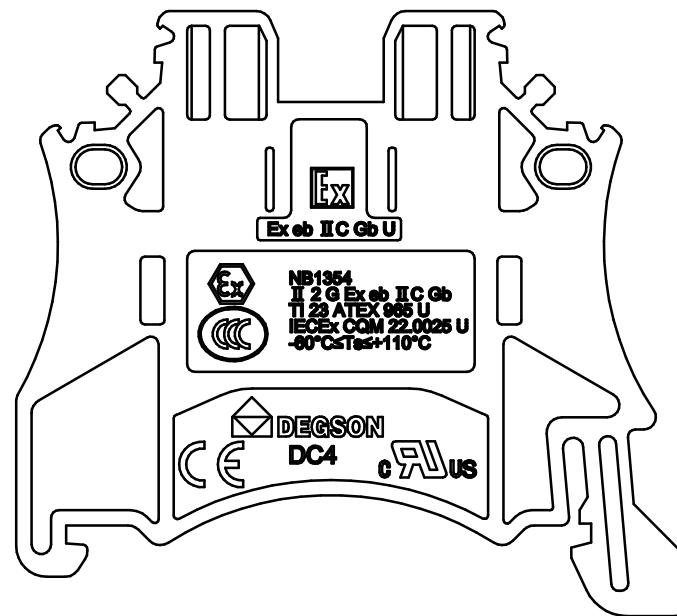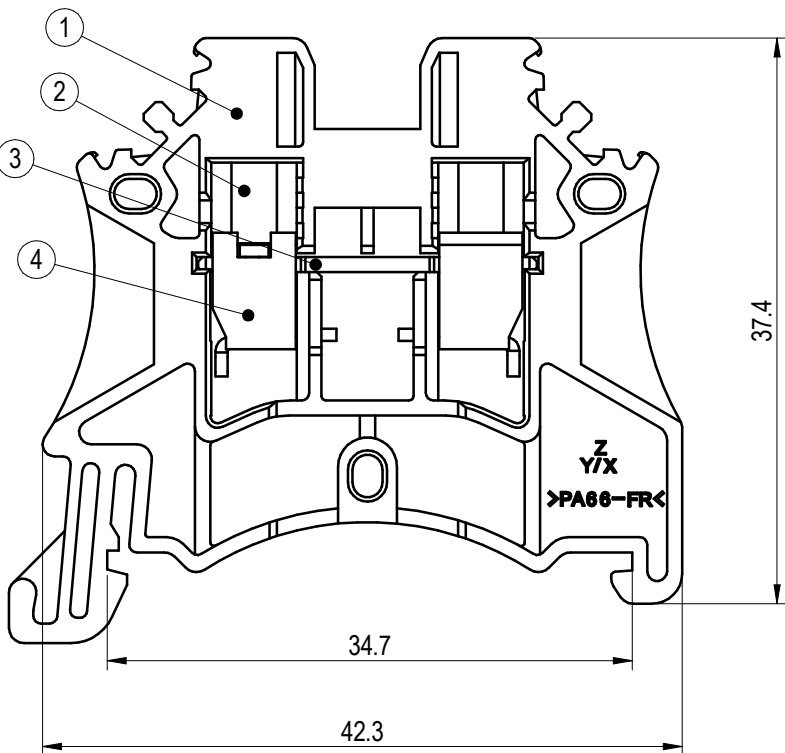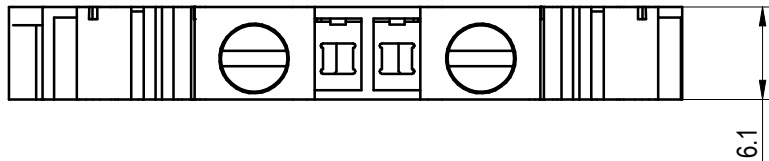

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电压/Current(A)	B	C	D
600/30	600/30	/	/

IEC 标准/IEC Standard:

过压类别/Ovenvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
---	-------	-------	------

额定电压/电压/Current(A)	1000/32	/	/
--------------------	---------	---	---

额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
-------------------------------------	---	---	---

螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.65/6		
-----------------------------------	------------	--	--

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22-10/0.5-4		
---	-------------	--	--

剥线长度/Stripping length(mm)	8-9		
---------------------------	-----	--	--

使用温度范围/Operating temperature(°C)	-40~+105		
----------------------------------	----------	--	--

符合RoHS环保要求/Conform to RoHS	Yes		
----------------------------	-----	--	--

4	Cage	Steel	M3/Zn Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL: /		SURFACE/COLOR: /	
MAT NO./REV: /		/ /		MAT STATUS: 批量	
APPD: Peng M	2022.10.31	NAME			
CHKD: Gao WG	2022.10.31	DC4-01P-11-00L (H)			
DRFT: Huang RJ	2022.10.31	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200118732	CUSTOMER DRAWING	已发布	2:1
				SHEET	1/1

00	/	New Product	Huang RJ	2022.10.31
REV	ECN	DESCRIPTION	DRFT	DATE