

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利予以明确授权，否则禁止转让、复制、引用、交流本文件的内容。侵犯者将承担法律责任。本公司保留所有权利及发明、实用新型或外观设计的所有权利。

FOR-1755 Rev.1.9


2

3


4

5


6

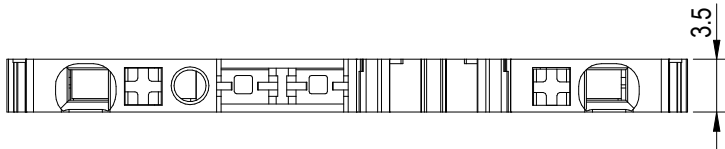

3.5

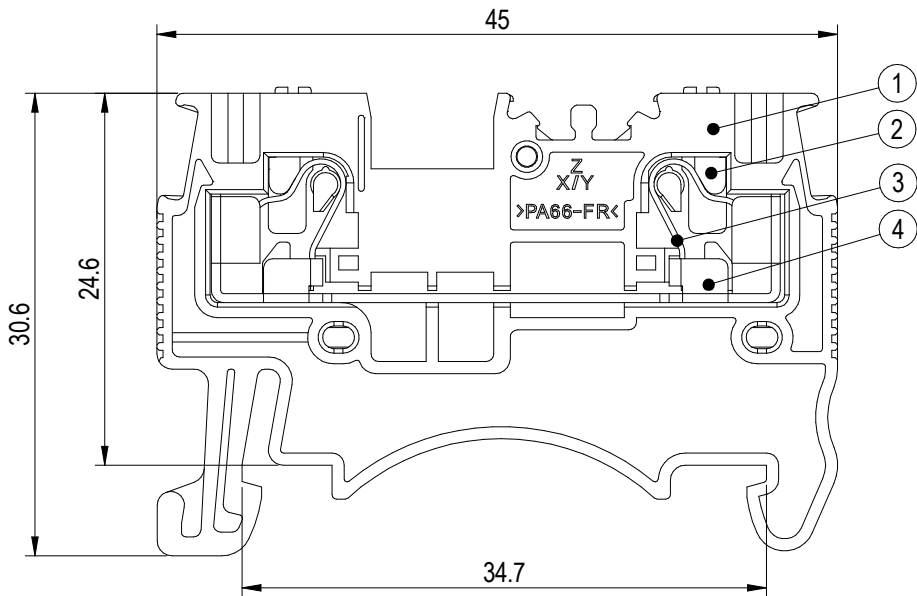

未注公差/General tolerances(mm)														 0.1/10  ±2°
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
UL 标准/UL Standard:										B	C	D		
额定电压/电流/Rated Voltage(V)/Current(A)										300/15	300/15	300/10		
IEC 标准/IEC Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree										Ⅲ/3	/	/		
额定电压/电流/Rated Voltage(V)/Current(A)										500/17.5	/	/		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)										6.0	/	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)										0.14~1.5(with ferrule with plastic sleeve max.0.5mm ²)/26~16&14(SOL)				
间距/Pitch(mm)/线数范围/Poles										3.5/N=N1P				
剥线长度/Stripping length(mm)										8~10				
使用温度范围/Operating temperature(°C)										-40~+105				
符合 RoHS 环保要求/Conform to RoHS										Yes				
标准颜色编号/Standard color number: PANTONE / RAL										/				

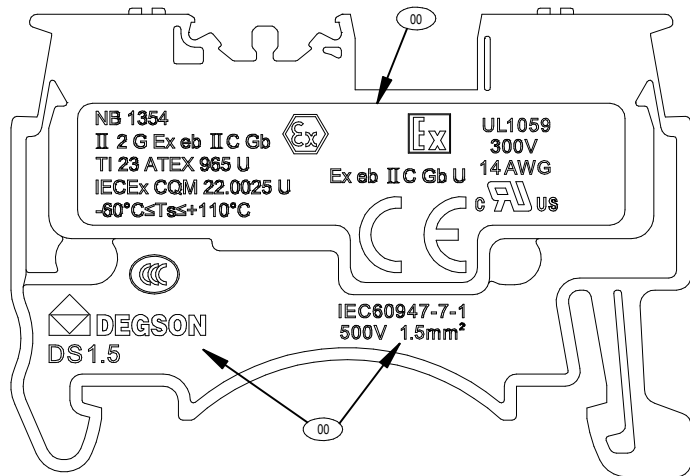

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:					
		MAT NO./REV:		/ 00		MAT STATUS: work			
APPD: 李根芳	2024.02.23	NAME DS1.5-01P-11-00L(H)							
CHKD: 马恩开	2024.02.23								
DRFT: 姜海文	2024.02.23								
		DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
		200270174		CUSTOMER DRAWING		已发布		2:1	1/1

00	/	NEW DRAWING	姜海文	2024.02.23
REV	ECN	DESCRIPTION	DRFT	DATE