

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交流本文档的内容, 一经发现将追究法律责任。 保留模型和外观专利的所有权利。

FOR-1755 Rev.1.3



2

3




4

5

6

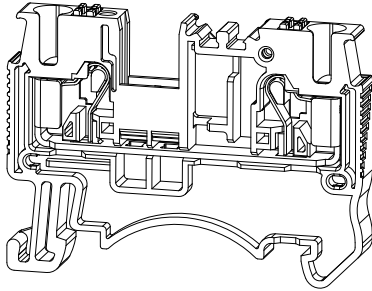

未注公差/General tolerances (mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2'
UL 标准/UL Standard:										B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)										600V/20	600/20	600/5	
IEC 标准/IEC Standard:													
过压类别/Overvoltage Category/污染等级/Pollution Degree										III/3	/	/	
额定电压/电流/Rated Voltage(V)/Current(A)										800/24	/	/	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)										8.0	/	/	
线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm²)										26~12 / 0.2~2.5&4(SOL)			
间距/Pitch(mm)/线数范围/Poles										5.2(N=01P)			
剥线长度/Stripping length(mm)										10~12			
使用温度范围/Operating temperature(°C)										-40~+105			
符合 RoHS 环保要求/Conform to RoHS										Yes			
标准颜色编号/Standard color number: PANTONE / RAL										/			

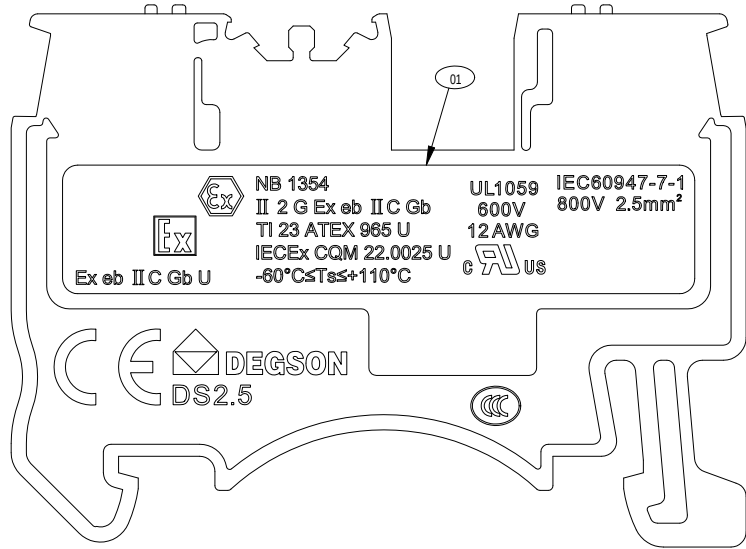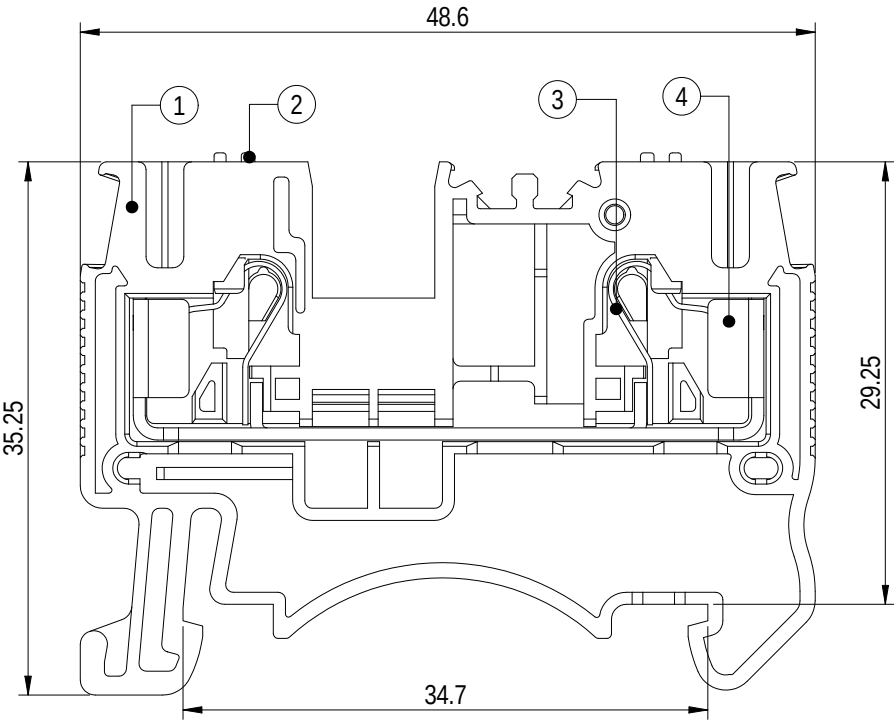

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
APPD: 李根芳		MAT NO./REV: 11040001501-1 / 00		MAT STATUS: work	
CHKD: 马恩升		NAME			
DRFT: 宗明忠		DS2.5-01P-11-00L(H)			
DRAWING NO.		TYPE		DRAWING STATUS	SCALE
A4		CUSTOMER DRAWING		已发布	2:1
(inch)		200013182		SHEET	
				1/1	

01		Remove the EAC	宗明忠	2024.07.03
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6