

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.8


2

3



4

5


6



4

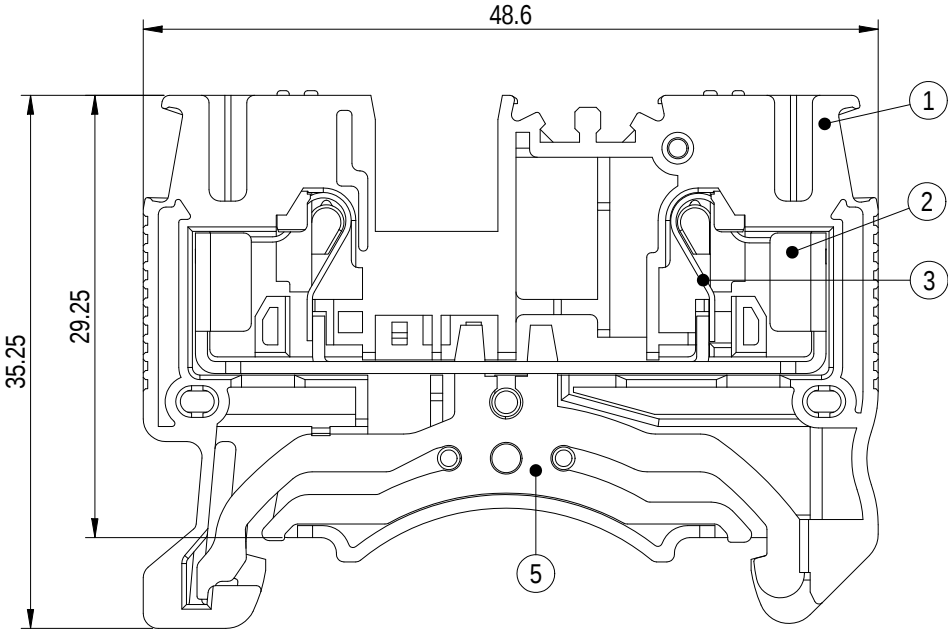

未注公差/General tolerances (mm)														 0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	 ±2'
UL 标准/UL Standard:										B	C	D		
额定电压/电流/Rated Voltage(V)/Current(A)										/	/	/		
IEC 标准/IEC Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree										Ⅲ/3	Ⅲ/2	Ⅱ/2		
额定电压/电流/Rated Voltage(V)/Current(A)										/	/	/		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)										8	/	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)										26~12 / 0.2~2.5.4(Sol)				
间距/Pitch(mm)/线数范围/Poles										5.20/01P				
剥线长度/Stripping length(mm)										10~12				
使用温度范围/Operating temperature(°C)										-40~+105				
符合 RoHS 环保要求/Conform to RoHS										Yes				

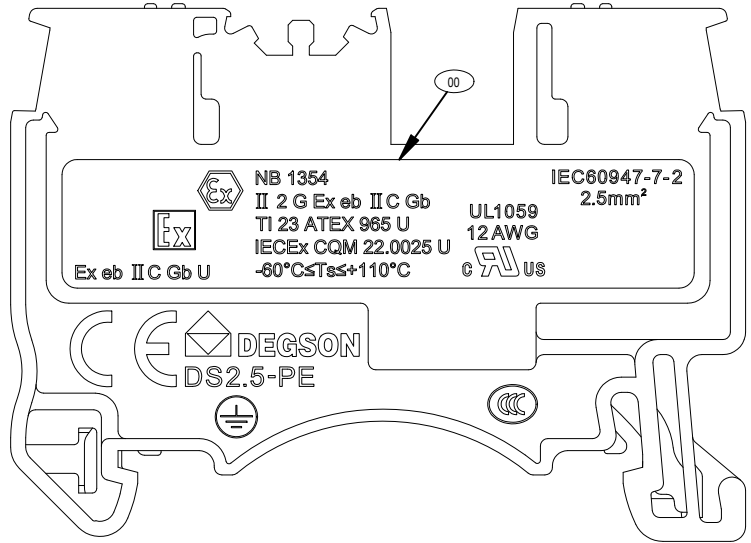

5	Grounding	Copper alloy	Sn plated
4	Button	PA66+GF%	UL94V-0
3	Spring	Stainless steel	/
2	Current carrier	Copper	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: 11040001502-1 / 00		MAT STATUS: work		
APPD: 李根芳	2024.07.04	NAME DS2.5-PE-01P-1C-00L(H)				
CHKD: 马恩升	2024.07.04					
DRFT: 宗明忠	2024.07.04					
 A4		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200270193	CUSTOMER DRAWING	work	2:1	1/1

01		Authentication lettering update	宗明忠	2024.07.04
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6