

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、商标、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和外观设计专利等权利外，其他权利均归本公司所有。本公司保留对涉及发明、实用新型和外观设计专利的权利。

FOR-1755 Rev.2.0

2

3

4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	0.1/10
±2'														

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current (A)

B

600/20

C

600/20

D

600/5

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

/

/

额定电压/电压/Rated Voltage(V)/Current (A)

800/24

/

/

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

8.0

/

/

线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm²)

0.2~2.5&4(SOL)/
26~12

间距/Pitch(mm)

5.2

剥线长度/Stripping length(mm)

10~12

使用温度范围/Operating temperature(°C)

-40~+105

符合 RoHS 环保要求/Conform to RoHS




Yes

标准颜色编号/Standard color number: PANTONE / RAL

/



2

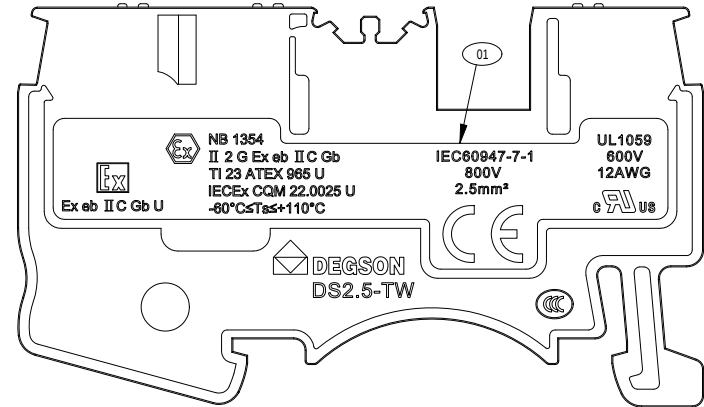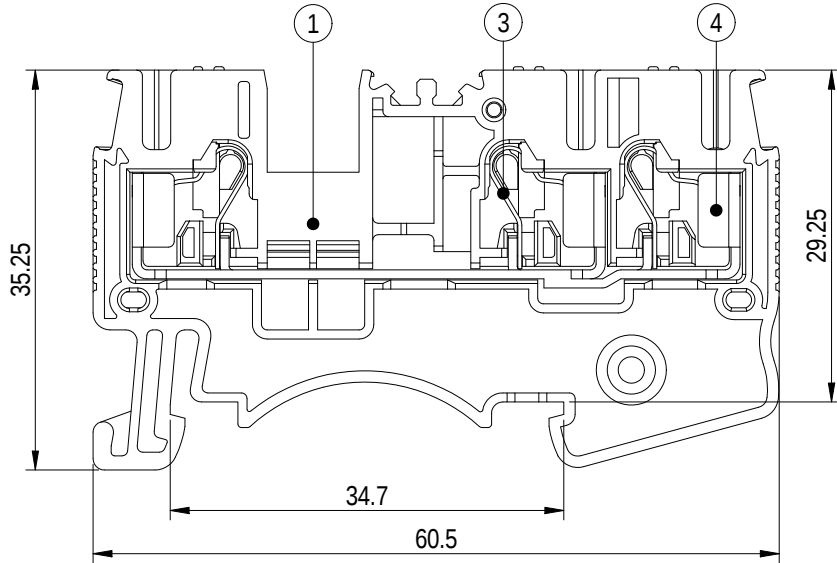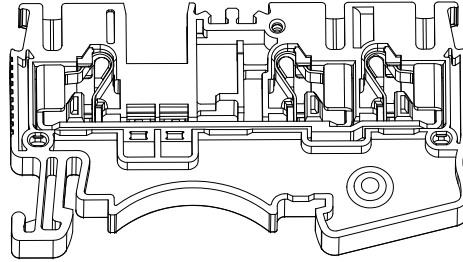

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE/COLOR:	
APPD: 李根芳		2024.07.03		MAT NO./REV: 11040001506-1 / 00	
CHKD: 马恩升		2024.07.03		MAT STATUS: work	
DRFT: 宗明忠		2024.07.03		NAME	
DRAWING NO.		TYPE		DRAWING STATUS	
200270585		CUSTOMER DRAWING		已发布	
SCALE		SHEET		1/1	
1.5:1					

01		EAC lettering removal	宗明忠	2024.07.03
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6