

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经许可，不得复制或传播本文件内容。擅自复制或传播本文件内容，侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3




2

3

4


5

6

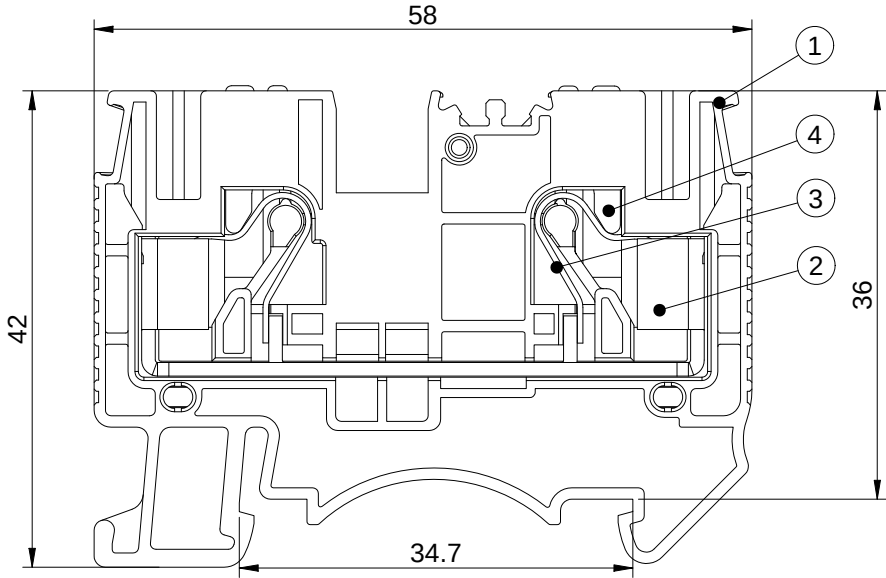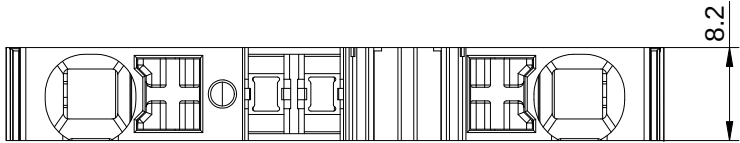

未注公差/General tolerances (mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

4	Button	PA66+GF%	UL94V-0
3	Spring	Stainless steel	/
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

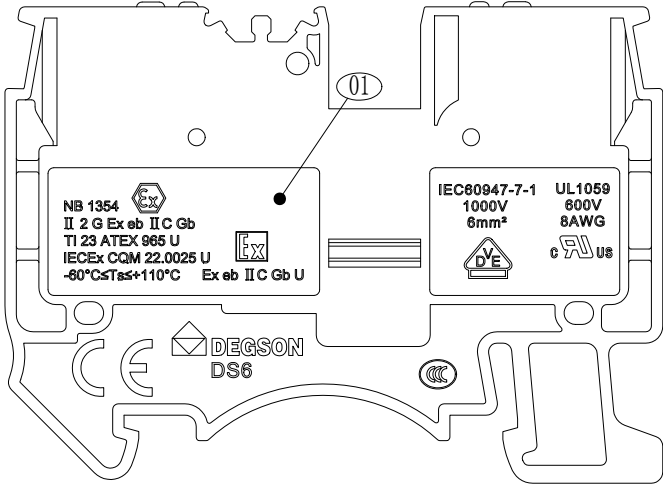

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current (A)	600V/50	600V/50	600V/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current (A)	1000/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N · m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	0.5~6&10(sol)/20~8		
间距/Pitch(mm)/线数范围/Poles	8.2/01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

		MATERIAL:		SURFACE:			
		MAT NO./REV: 11040001526-1 / 00		MAT STATUS: work			
APPD: 李根芳	2024.06.14	NAME DS6-01P-11-00L (H)					
CHKD: 马恩开	2024.06.13						
DRFT: 岑乔枫	2024.06.13	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
  A4		200012134	CUSTOMER DRAWING	已发布	1.5:1	1/1	

01		Explosion-proof lettering added	岑乔枫	2024.06.13
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6