

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经许可复制或传播本文件内容，或擅自使用本文件内容，均构成侵权，侵权者将承担法律责任。保留所有专利、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2

3

4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	 0.1/10  ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current (A)

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

额定电压/电压/Rated Voltage(V)/Current (A)

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm²)

间距/Pitch(mm)

剥线长度/Stripping length(mm)

使用温度范围/Operating temperature(°C)

符合 RoHS 环保要求/Conform to RoHS

标准颜色编号/Standard color number: PANTONE / RAL

B

C





D

A

B



C

D

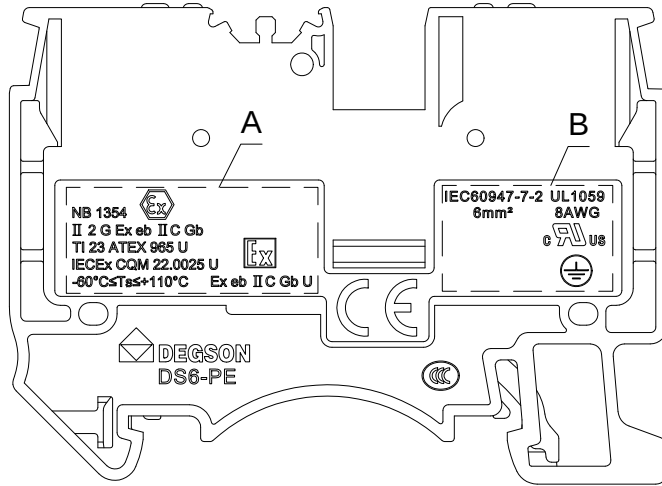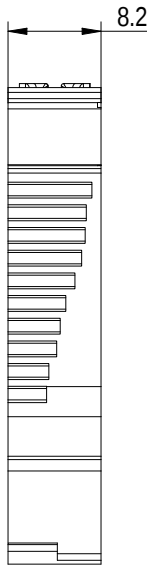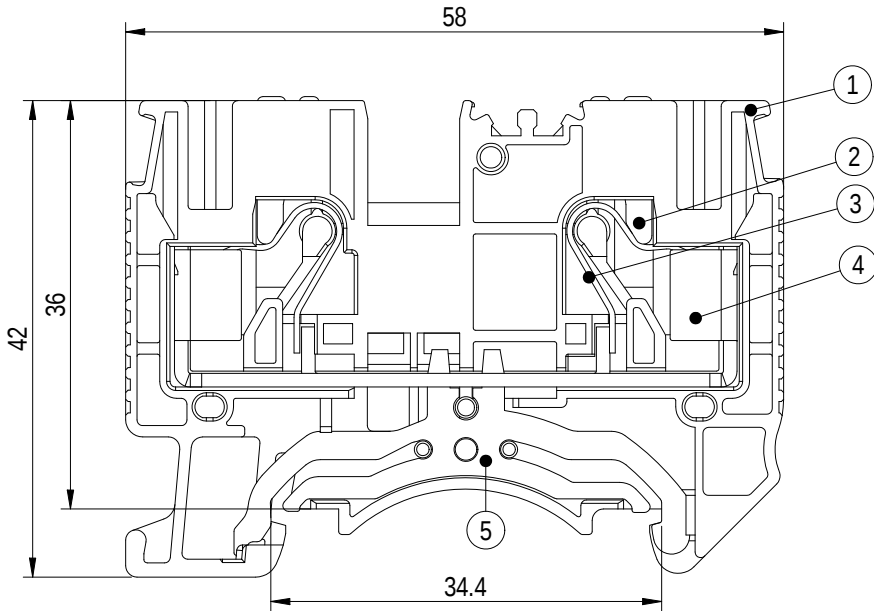

A
3:1

B
3:1

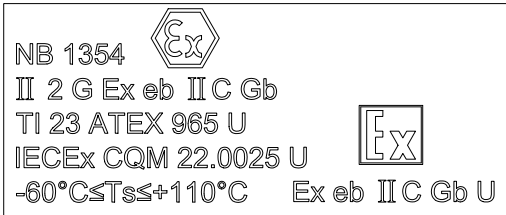

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding	Copper alloy	Sn Plated
4	Current Carrier	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66-GF%	UL94V-0
1	Housing	PA66	UL94V-0

		MATERIAL:		SURFACE:	
APPD: 李振芳		2024.06.27		MAT NO./REV: 11040001495-1 / 00	
CHKD: 马恩开		2024.06.27		MAT STATUS: work	
DRFT: 岑乔枫		2024.06.27		NAME: DS6-PE-01P-1C-00L (H)	
DRAWING NO. 200023960		TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布	
SCALE 1.5:1		SHEET 1/1			

REV	ECN	DESCRIPTION	DRFT	DATE
02		Explosion-proof lettering added	岑乔枫	2024.06.27

1

2

3

4

5

6