

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可明确授权, 否则禁止转让、复制、利用、交回本文档的内容, 侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2

3

4

5

6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	 0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

UL 标准/ UL Standard:

额定电压/ 电流/ Rated Voltage(V)/ Current(A)

B

300V 28

C

300/ 28

D

300/ 10

IEC 标准/ IEC Standard:

过压类别/ Overvoltage Category/ 污染等级/ Pollution Degree

III/ 3

III/ 2

IV 2

额定电压/ 电流/ Rated Voltage(V)/ Current(A)

500/ 32

/

/

额定脉冲电压(KV)/ Rate Impulse Voltage(KV)

6.0

/

/

线径范围(硬线和软线)/ Wire Range(rigid and flexible)(AWG mm²)

24~10 / 0.2~4&6(SCL)

间距/ Pitch(mm)/ 线数范围/ Poles

6.2/ N=01P

剥线长度/ Stripping length(mm)

11~13

使用温度范围/ Operating temperature(°C)





- 40~+105

符合 RoHS 环保要求/ Conform to RoHS


Yes

标准颜色编号/ Standard color number: PANTONE / RAL


/

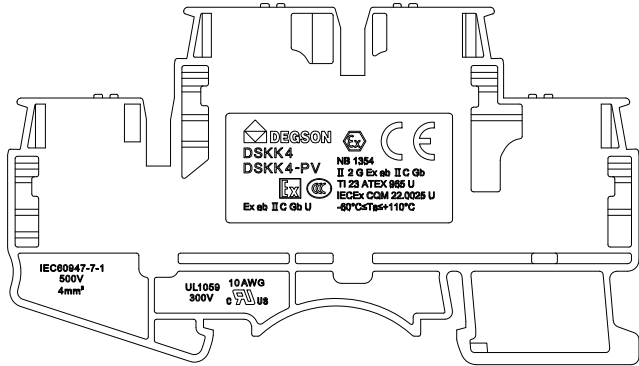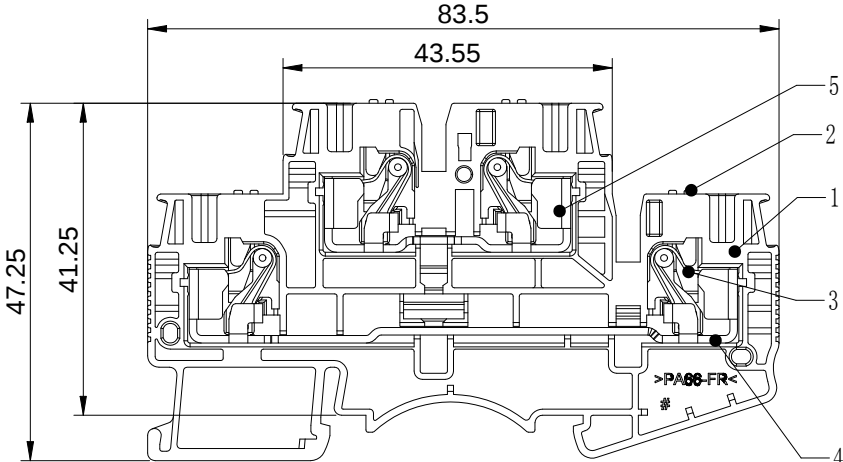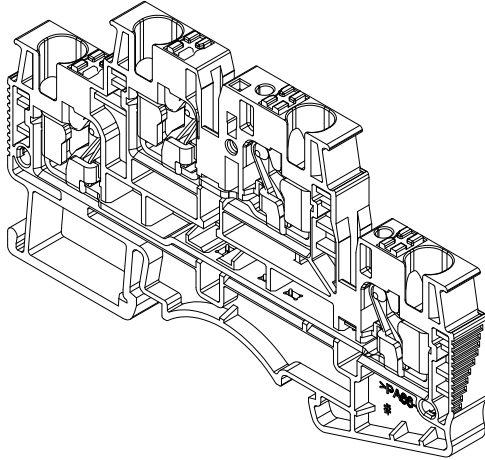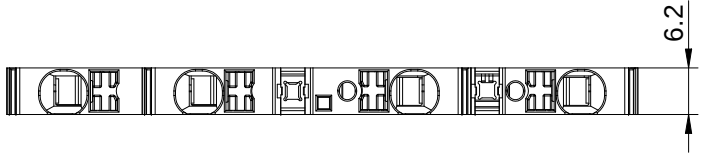

5	Current Carrier 2	Copper	Sn Plated
4	Current Carrier 1	Copper	Sn Plated
3	Spring	Stainless Steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:		SURFACE:		
		MAT NO./REV: 11040001497-1 / 00		MAT STATUS: work		
APPD: 李根芳	2024.06.25	NAME DSKK4-01P-11-00L(H)				
CHKD: 马恩开	2024.06.24					
DRFT: 岑乔枫	2024.06.21					
 A4 		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200024480	CUSTOMER DRAWING	已发布	2:1	1/1

01		Change printing	岑乔枫	2024.06.21
REV	ECN	DESCRIPTION	DRFT	DATE



DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200024480	CUSTOMER DRAWING	已发布	2:1	1/1