

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和外观设计专利权等知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev. 2.0



2

3


4

5

6

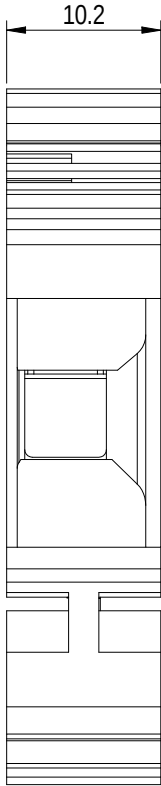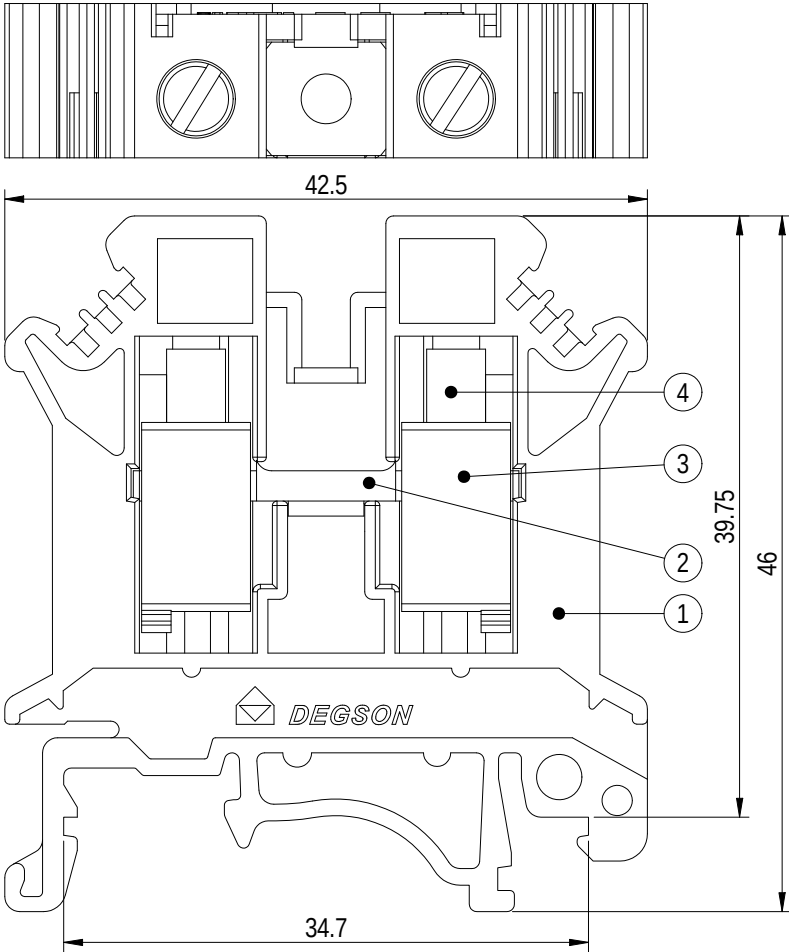

未注公差/General tolerances (mm)													0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

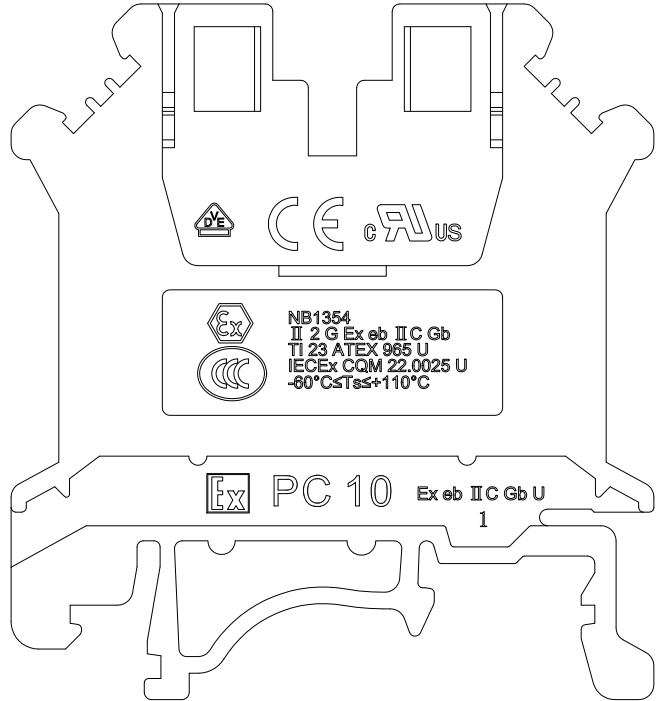

4	Screw	Copper Alloy	M4/Ni Plated
3	Cage	Copper Alloy	M4/Ni Plated
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/65	600/65	600/5
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级/Pollution Degree	II/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/57	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N· m/Lb.in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	10-20(Sol/Str)&6-8(Str) / 0.2~10		
间距/Pitch(mm)	10.20		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

01		Remove EAC lettering	陈科泽	2024.06.25
REV	ECN	DESCRIPTION	DRFT	DATE



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: 11010001251-1 / 00	MAT STATUS: work

APPD: 彭敏	2024.06.27
CHKD: 陆军科	2024.06.26

NAME	PC10-01P-11-00L (H)
------	---------------------

DRFT: 陈科泽	2024.06.25	DRAWING NO. 200119104	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1	SHEET 1/1
-----------	------------	-----------------------	-----------------------	--------------------	-----------	-----------