
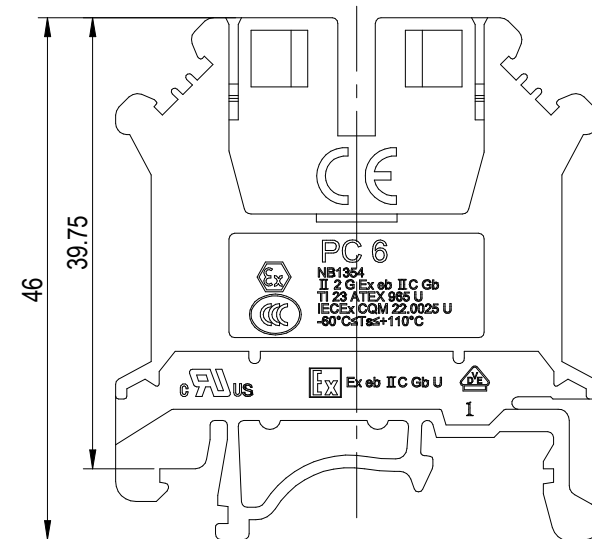


4	Screw	Copper Alloy	M4\Ni Plated
3	Cage	Copper Alloy	M4\Ni Plated
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	ULS4V-0
ITEM	NAME OF PART	MATERIAL	NOTES



Please refer to the exploded view diagram for these units.

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/50	600/50	600/5
IEC 标准/IEC Standard:			
过压类别/Over voltage Category/污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	800/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	10~24(Sol/Str)&8(str) /0.2~6		
间距/Pitch(mm)/线数范围/Poles	8.2/N=01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: 11010001249-1 / 00		MAT STATUS: work		
APPD: 彭敏	2024.07.03	NAME PC6-01P-11-00L(H)				
CHKD: 高卫国	2024.07.03					
DRFT: 黄仁锦	2024.07.03	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4	 1inch	200278029	CUSTOMER DRAWING	已发布	5:1	1/1

00		Add explosion-proof certification lettering	黄仁锡	2024.07.03
REV	ECN	DESCRIPTION	DRFT	DATE