

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利予以明确授权, 否则禁止复制或传播, 否则禁止以任何形式或任何手段进行复制或传播, 否则禁止以任何形式或任何手段进行复制或传播。

FOR-1755 Rev.1.6

2

3



4

5

6

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

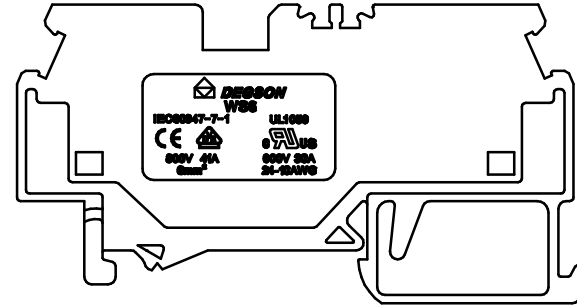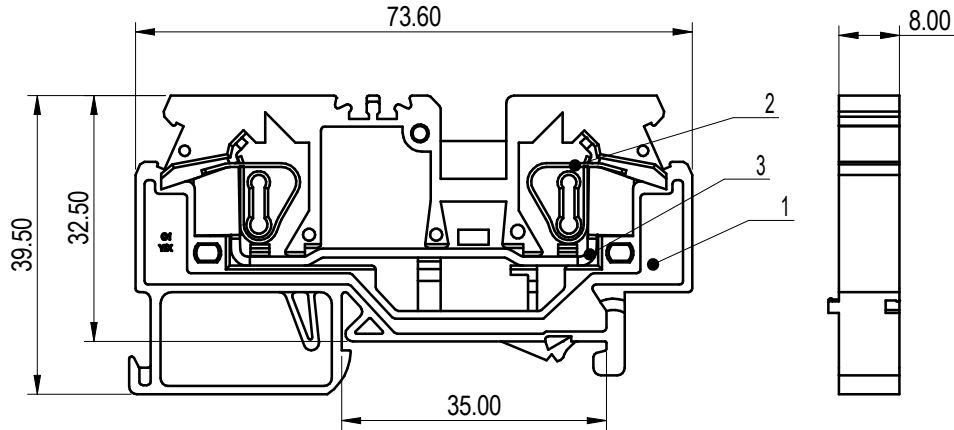

3	Current Carrier	Copper	Sn Plated
2	Spring	Stainless Steel	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/ UL Standard:	B	C	D
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	600/ 30	600/ 30	600/ 5
IEC 标准/ IEC Standard:			
过压类别/ Overvoltage Category	III/ 3	III/ 2	II/ 2
额定电压/ 电流/ Rated Voltage(V)/ Current(A)	800/ 41	/	/
额定脉冲电压(KV)/ Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/ Wire Range(rigid and flexible)(AWG mm²)	0.2-6/ 24~10(Stl)		
间距/ Pitch(mm)/ 线数范围/ Poles	8.0		
剥线长度/ Stripping length(mm)	12-13		
使用温度范围/ Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/ Conform to RoHS	Yes		
标准颜色编号/ Standard color number: PANTONE / RAL	/		

		MATERIAL:		SURFACE/COLOR:		
APPD: 彭敏		MAT NO./REV: 11030001198-1 / 00		MAT STATUS: work		
CHKD: 高卫国		NAME				
DRFT: 黄仁锦		WS6-01P-11-00L (H)				
DRAWING NO.		TYPE		DRAWING STATUS	SCALE	SHEET
200122980		CUSTOMER DRAWING		已发布	1:1	1/1

00		由CAD TO版加上VDE刻字升成SE00版	黄仁锦	2022.11.24
REV	ECN	DESCRIPTION	DRFT	DATE