
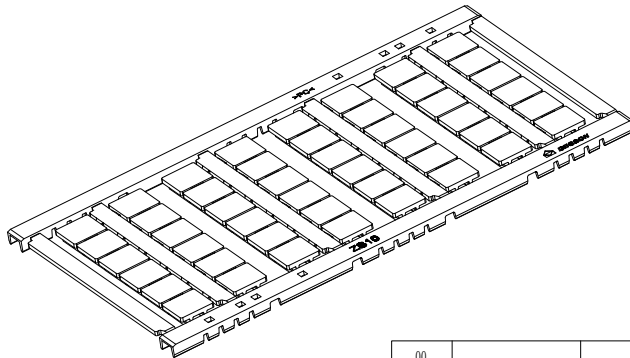
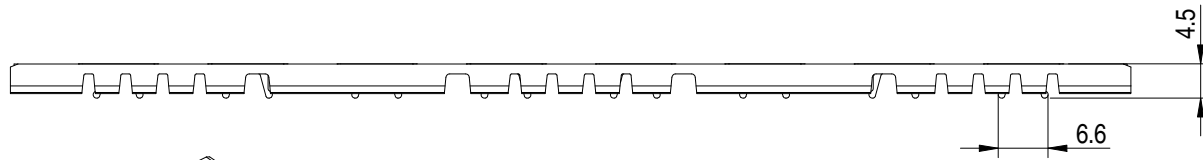


未注公差/General tolerances (mm)											0.1/10			
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

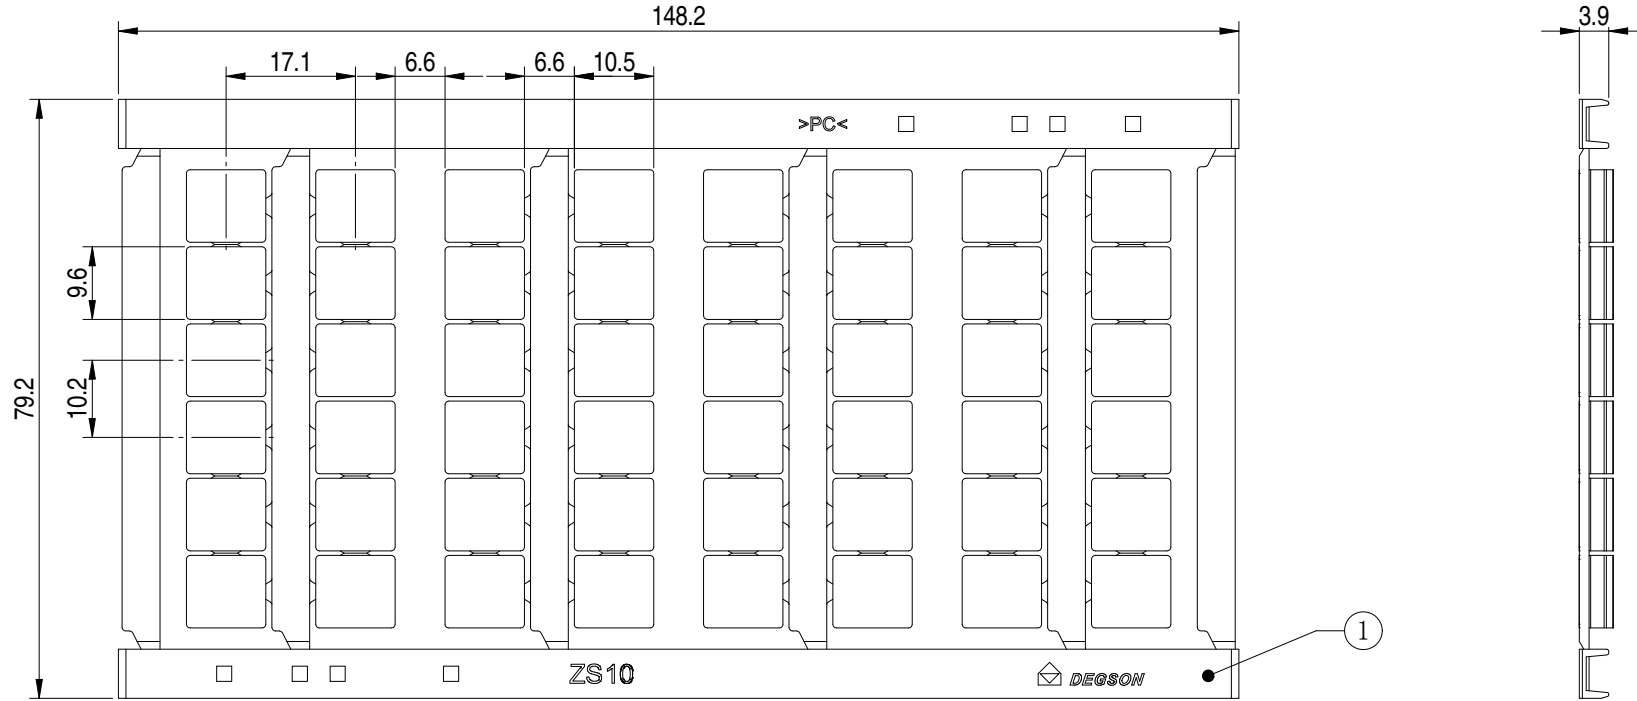

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PC	UL94V-2
间距/Pitch (mm)/线数范围/Poles			10.2/N=48P
使用温度范围/Operating temperature (°C)			-40~+110
符合 RoHS 环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number: PANTONE / RAL			/

		MATERIAL: PC	SURFACE/COLOR:	
APPD: 李根芳 2025.05.23 CHKD: 马恩升 2025.05.23		MAT NO./REV: 92118904466-1 / 00	MAT STATUS: work	
DRFT: 宗明志 2025.05.23		NAME: ZS10-48P-19-00L(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200349450	CUSTOMER DRAWING	work	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		NEW DRAWING	宗明志	2025.05.23

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利权明确标注、复制、引用、光碟等文件外，其他内容均受法律保护。 未经授权，不得复制或传播。