
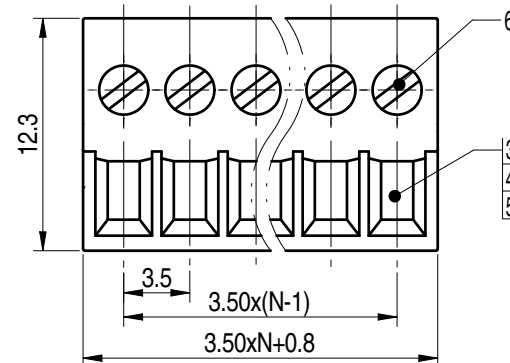
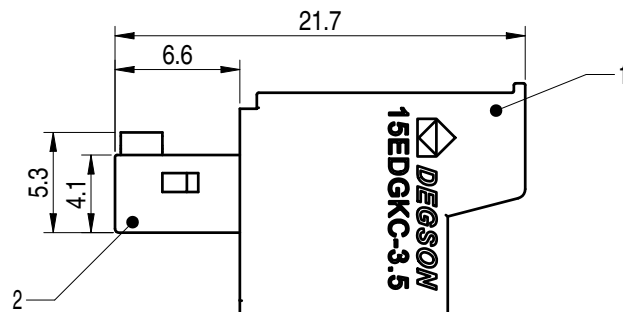


2P-6P have the salient,
7P-24P no have the salient

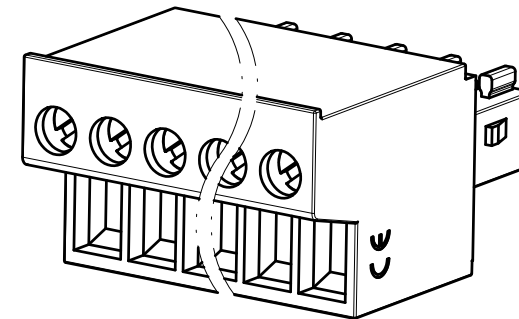

The A&Z(H) in the name means: A(H) and Z(H).

6	Screw	Steel	M2/Zn Plated
5	Cage	Steel	M2/Zn Plated
4	Slider	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	30~16/ 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV: - / 00		MAT STATUS: 批量	
APPD: 兰春华	2022.11.03	NAME 15EDGKC-3.5-XXP-1Y-00A&Z(H)			
CHKD: 龚耀志	2022.11.03				
DFT: 方哲盛	2022.11.03				
DRAWING NO.		TYPE	DRAWING STATUS		SCALE
		200019523	CUSTOMER DRAWING		已发布
					2.5:1
					1/1

00			方哲盛	2022.11.03
REV	ECN	DESCRIPTION	DRFT	DATE