
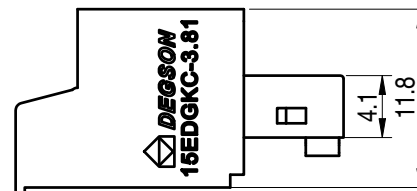
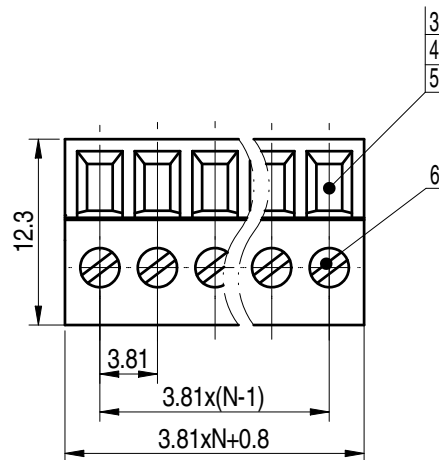



未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

with the salients for 2~6P on both sides
without them for 7~24P

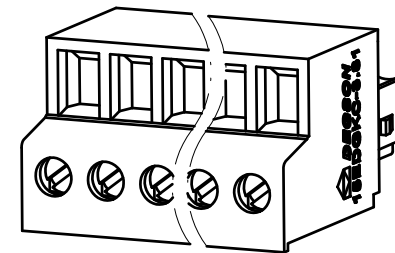

Note:

The A&Z(H) in the name means: A(H) and Z(H).

6	Screw	Steel	M2/Zn Plated
5	Cage	Steel	M2/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	160/8	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16 / 1.5	
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P	
剥线长度/Stripping length(mm)		6~7	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number: PANTONE / RAL		/	



MATERIAL:	SURFACE/COLOR:
MAT NO./REV:	MAT STATUS: 批量

APPD: 兰春华	2022.08.23	NAME	15EDGKC-3.81-XXP-1Y-00A&Z(H)
CHKD: 龚耀志	2022.08.23		

DRFT: 刘强	2022.08.23	DRAWING NO.	200103325	TYPE	CUSTOMER DRAWING	DRAWING STATUS	已发布	SCALE	2:1	SHEET	1/1
----------	------------	-------------	-----------	------	------------------	----------------	-----	-------	-----	-------	-----

00			刘强	2022.08.23
REV	ECN	DESCRIPTION	DRFT	DATE