

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)

B

C

D

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

III/2

II/2

额定电压/电流/Rated Voltage(V)/Current(A)

/

250/12

/

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

/

2.5

/

螺丝扭矩/Torque Tightening(N·m/Lb.in)

/

/

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)

28~16 / 0.2~1.5

间距/Pitch(mm)/线数范围/Poles

3.81/N=02~24P







剥线长度/Stripping length(mm)

9

使用温度范围/Operating temperature(°C)

-40~+105

with the salients for 02-06p
on both sides
without the for 07-24p

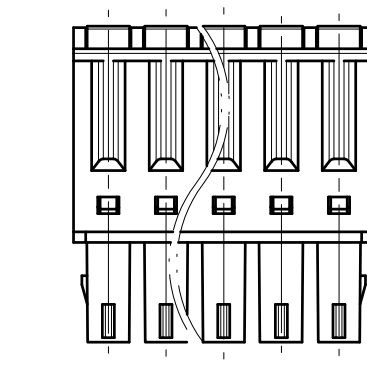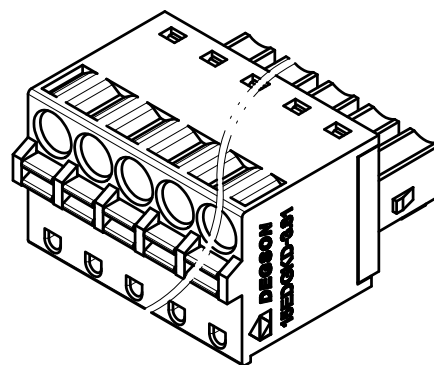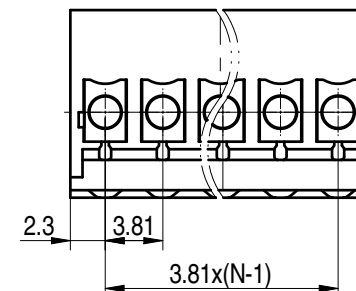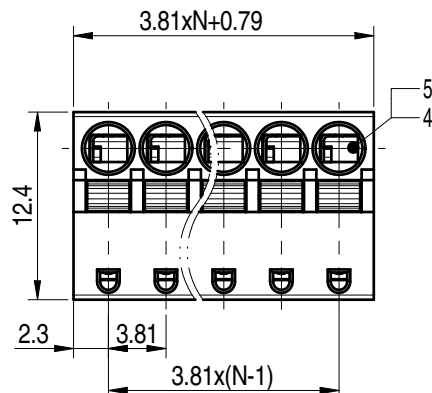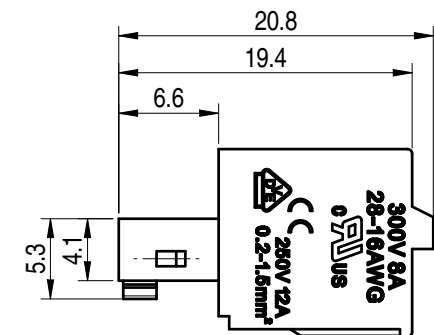

Note:

The A&Z(H) in the name means:A(H) and Z(H).

5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES



MATERIAL:

SURFACE/COLOR:

MAT NO./REV: - / 00

MAT STATUS: 批量

APPD: 兰春华

2023.04.18

CHKD: 龚耀志

2023.04.18

DRFT: 周锡锦

2023.04.18

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

200103928

CUSTOMER DRAWING

已发布

2:1

1/1

01			周锡锦	2023.04.18
REV	ECN	DESCRIPTION	DRFT	DATE