
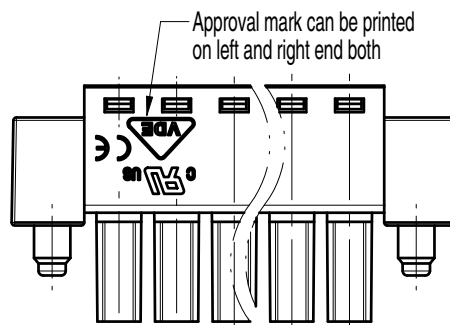

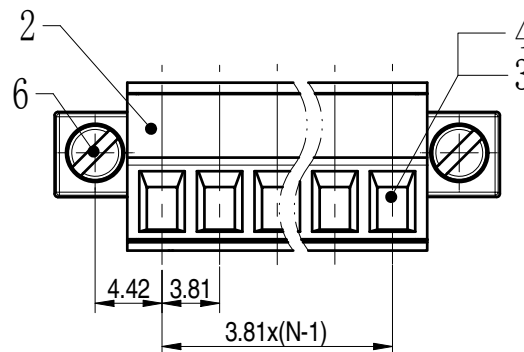




— Approval mark can be printed on left and right end both

6	Screw 2	Steel	M2.5/Zn Plated
5	Screw 1	Steel	M2/Zn Plated
4	Cage	Copper alloy	M2/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES			
UL 标准/UL Standard:		B	C	D		
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	300/8		
IEC 标准/IEC Standard:						
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	250/7		
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)		/	/	2.5		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77				
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16 / 0.5~1.5				
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P				
剥线长度/Stripping length(mm)		6~7				
使用温度范围/Operating temperature(°C)		-40~+105				
符合RoHS环保要求/Conform to RoHS		Yes				

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD: 兰春华	2022.09.09	NAME 15EDGKM-3.81-XXP-1Y-00A&Z(H)				
CHKD: 龚耀志	2022.09.09					
DRFT: 朱岳鹏	2022.09.09	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4		200029769	CUSTOMER DRAWING	已发布	2:1	1/1

00			朱岳鹏	2022.09.0
REV	ECN	DESCRIPTION	DRFT	DATE