
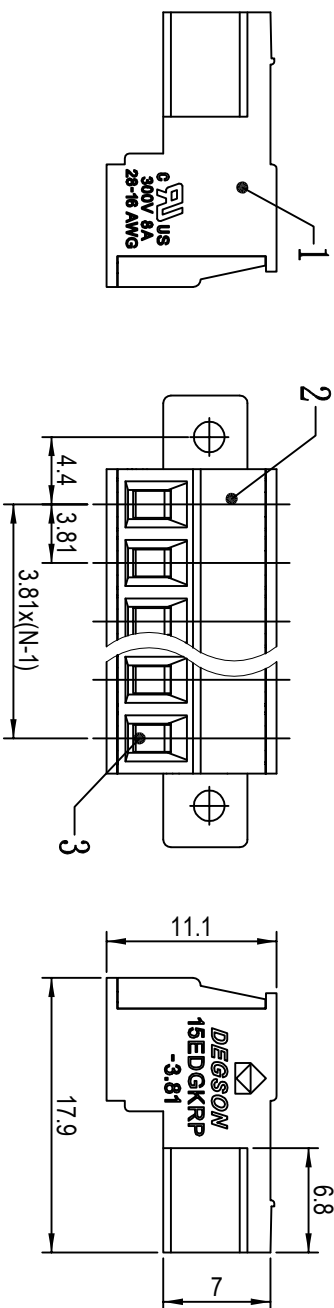
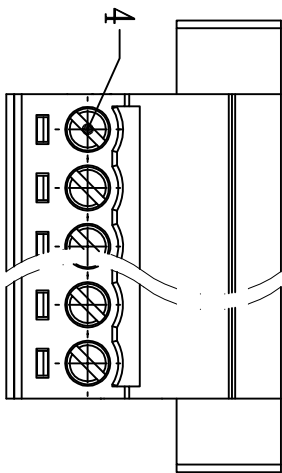
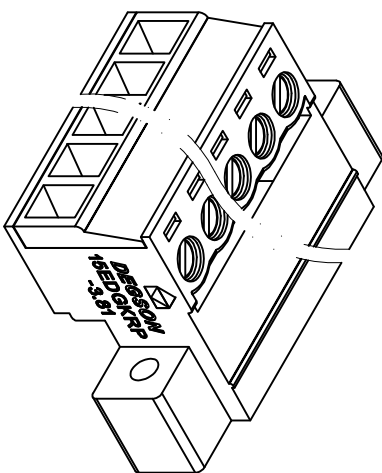


未注公差/general tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	3	6	10	18	30	50	80	120	180	250	315	400	500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
D 0.1/10													
1/2													

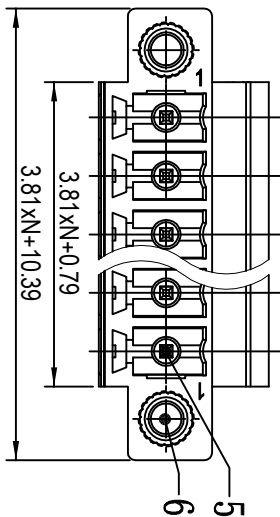

6	Screw cap	Copper alloy	M2.5	
5	Pin	Copper	Sn Plated	
4	Screw	Steel	M2/Zn Plated	
3	Cage	Copper alloy	M2/Ni Plated	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:				
额定电压/电压/Rated Voltage(V)	Current(A)	B	C	D
		300/8	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree				
额定电压/电压/Rated Voltage(V)	Current(A)	III/3	III/2	II/2
额定脉冲电压/电压/Rated Impulse Voltage(KV)	Rate Impulse Voltage(KV)	/	/	250/7
螺栓扭矩/Torque Tightening(N·m/Lb·in)		/	/	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		M2 0.2/1.77		
间距/Pitch(mm)	线数/范围/Poles	28~16 / 1.5		
剥线长度/Stripping length(mm)		3.81/N=02~16P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

 DEBSOHN	MATERIAL:	SURFACE/COLOR:
	MAT NO./REV: / 00	MAT STATUS: 数量

				CHNO: 李耀志		2024.02.28			
01		1#修正品标题	朱岳鹏	2024.02.28	DRAFT: 朱岳鹏	2024.02.28			
REV	ECN	DESCRIPTION	DRAFT	DATE			A4	 (inch)	DRAWING NO. 2000020011
					TYPE		CUSTOMER DRAWING		DRAWING STATUS 已发布
					SCALE		SHEET		15EDGKRP-3.81-XXP-1Y-00A&Z(H) 2:1 1/1