
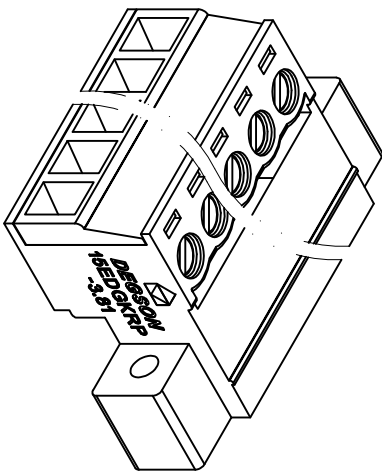
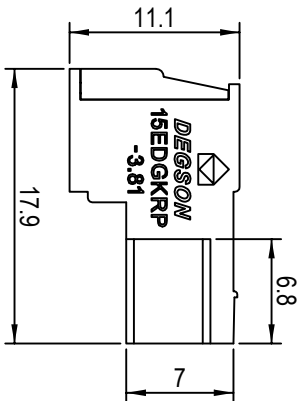
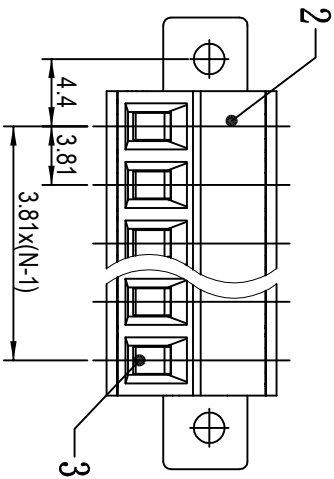
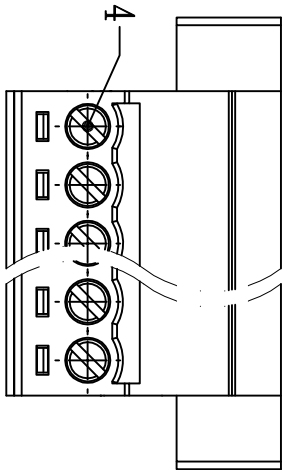


公差/差/General tolerances(mm)														0.1/10
0	~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	0.1/10
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~7	0.1/10
±0.12;±0.18;±0.22;±0.26;±0.31;±0.37;±0.57;±0.80;±0.93;±1.05;±1.15;±1.60;±2.20;±2.50														±7

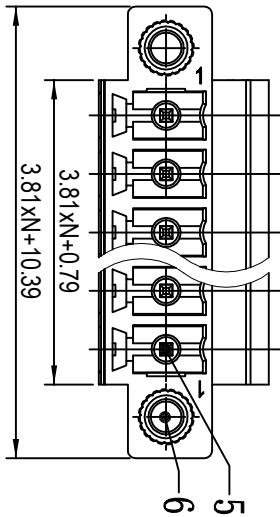

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw cap	Copper alloy	M2.5
5	Pin	Copper	Sn Plated
4	Screw	Steel	M2/Zn Plated
3	Cage	Copper alloy	M2/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)/Current(A)		300/8	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/Rated Voltage(V)/Current(A)		/	/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	2.5
螺丝扭矩/Torque Tightening(N·m/Lb·in)				
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)				
间距/Pitch(mm)/线数范围/Poles				
剥线长度/Stripping length(mm)				
使用温度范围/Operating temperature(°C)				
符合RoHS环保要求/Conform to RoHS				

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		MAT STATUS: 批号	

APD: 兰春华	2024.02.28	NAME	1SEDGKRP-3.81-XP-1Y-00AAZ (H)
CHD: 姜耀志	2024.02.28	DRAWING NO.	200020011
DRT: 朱岳鹏	2024.02.28	TYPE	CUSTOMER DRAWING
REV: 01	ECN	DRAWING STATUS	已发布
DESCRIPTION		SCALE	2:1
1号正品结构图		SHEET	1/1