

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、名称权、专利权、著作权等权利外，本公司保留其他一切权利。未经许可，不得复制或传播。

FOR-1755 Rev.1.7

2

3





4

5

6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

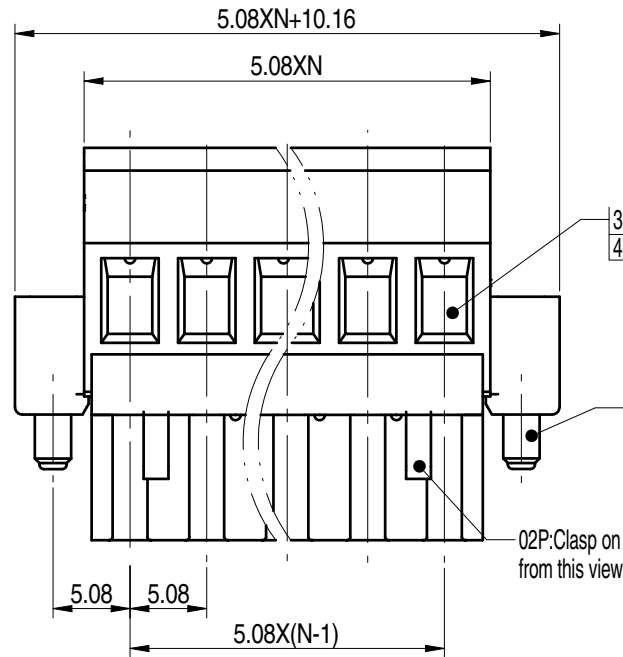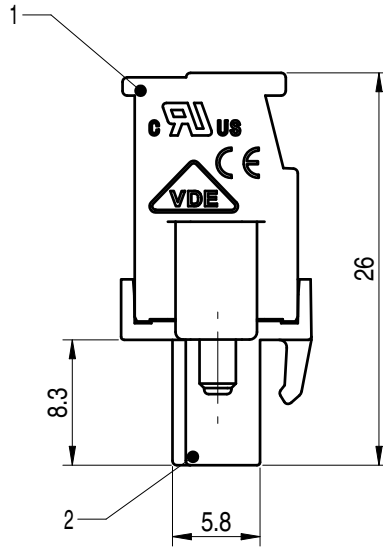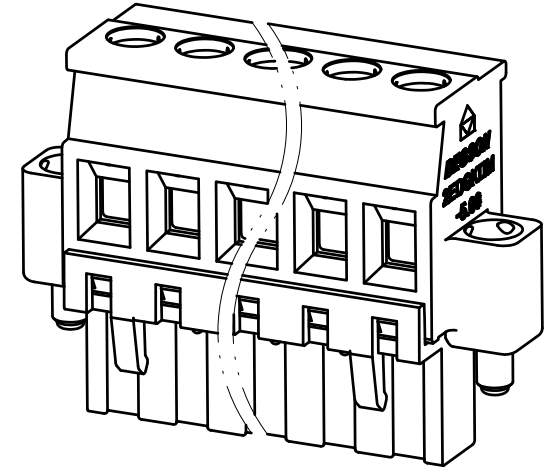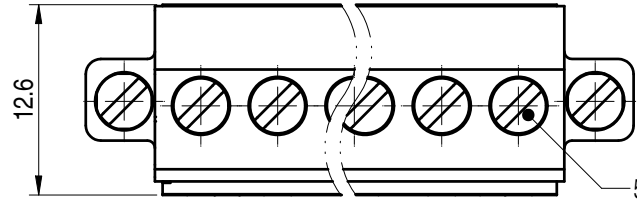

02P:Clasp on the right from this view

Note:

The A&Z(H) in the name means: A(H) and Z(H).

6	Screw 2	Steel	M2.5/Zn Plated
5	Screw 1	Steel	M3/Zn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/18	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.6/5.3		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12/1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~22P		
剥线长度/Stripping length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

APPD: 兰春华	2022.08.03
CHKD: 龚耀志	2022.08.03
DRFT: 方哲盛	2022.08.03

NAME	2EDGKAM-5.08-XXP-1Y-1000A&Z(H)			
------	--------------------------------	--	--	--

00			方哲盛	2022.08.03
REV	ECN	DESCRIPTION	DRFT	DATE

DRFT: 方哲盛	2022.08.03
-----------	------------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200019017	CUSTOMER DRAWING	已发布	2:1	1/1

1

2

3

4

5

6