

Transfer or duplication of this document as well as the utilization or reproduction of its contents are prohibited without the prior written consent of the manufacturer. All rights reserved for patent. 禁止将本文件复制或将其内容用于其他用途，未经制造商事先书面同意。保留所有权利。专利侵权必究。

FOR-1759 Rev.1.7

2

3



4

5






6

7

8



公差/公差 (General tolerances (mm))													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

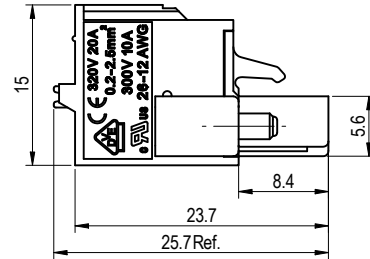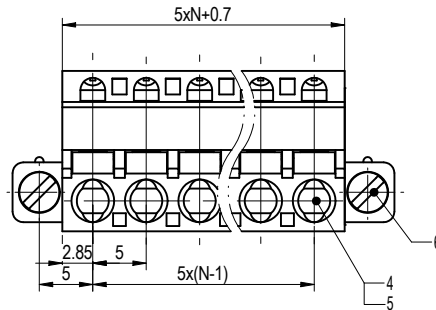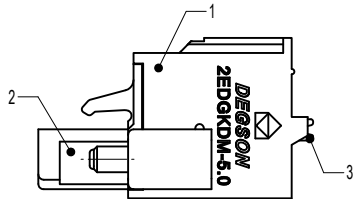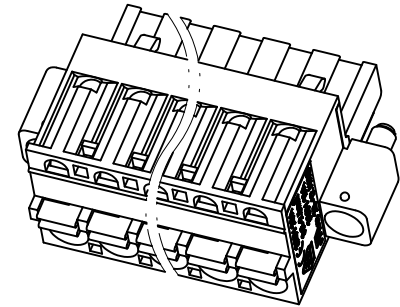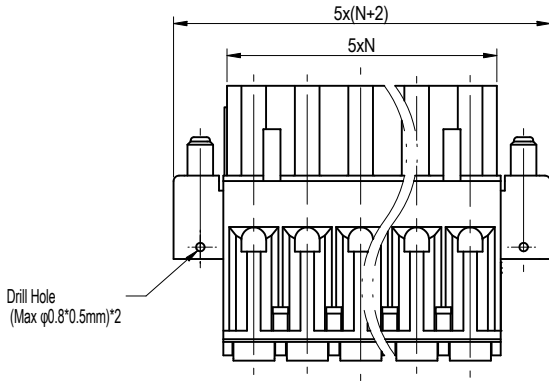


Note:
The A&Z (H) in the name means: A (H) and Z (H).

6	Screw	Steel	M2.5/Zn Plated
5	Spring	Stainless steel	/
4	Clamp	Copper Alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage (V)/Current (A)		300/10	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	II/2	II/2
额定电压/电压/Rated Voltage (V)/Current (A)		/	320/20	/
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)		/	4	/
螺丝扭矩/Torque Tightening (N·m/Lb.in)		M2.5, 0.4/3.6		
线径范围 (硬线和软线)/Wire Range (rigid and flexible) (AWG/mm²)		26~12 / 0.2~2.5		
间距/Pitch (mm)/线数范围/Poles		5.0/N=02~22P		
剥线长度/Stripping length (mm)		9~10		
使用温度范围/Operating temperature (°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: - / 00		NAME		MAT STATUS: 批量	
2EDGKDM-5.0-XXP-1Y-00A&Z (H)					
APPD: 兰泰华	2022.11.10				
CHKD: 黄耀志	2022.11.09				
DFT: 周伟德	2022.11.09				
DRAWING NO.	200021149	TYPE	CUSTOMER DRAWING	DRAWING STATUS	已发布
SCALE	2:1	SHEET	1/1		

00	ECN	DESCRIPTION	周伟德	2022.11.09
REV	ECN	DESCRIPTION	DFT	DATE



1

2

3

4

5

6

7

8