



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent.
utility model or designs registrations. 除非经书面特别许可，否则上述行为均属违法。侵犯者将负责赔偿损失。版权所有，不论是否已经注册专利或外观设计。


Please refer to the 3D model
for thouse unmarked dimensions

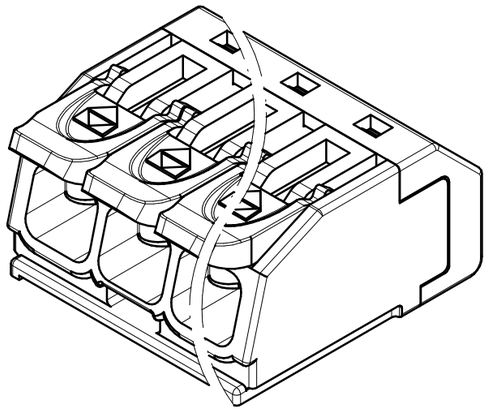

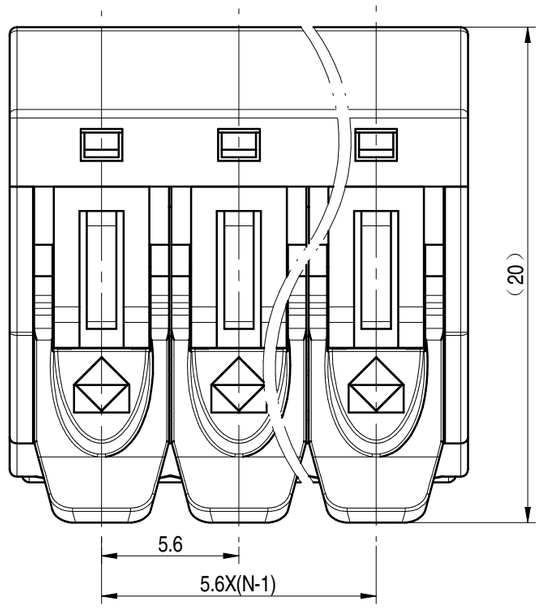

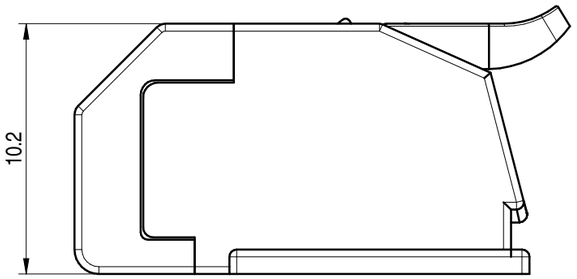


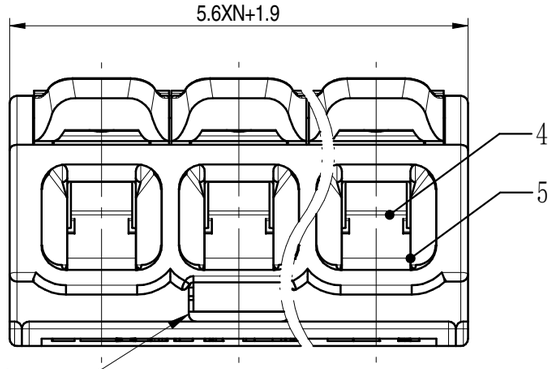

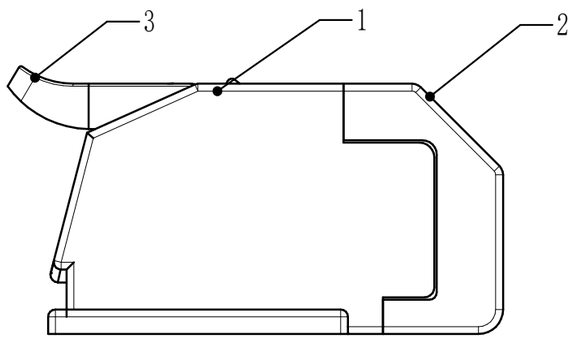



THe test hole at 02P is
on the right

02P

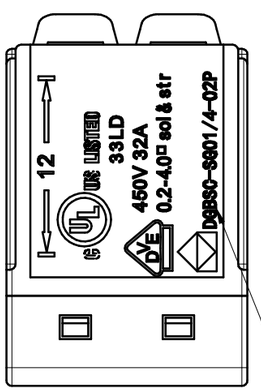

05P

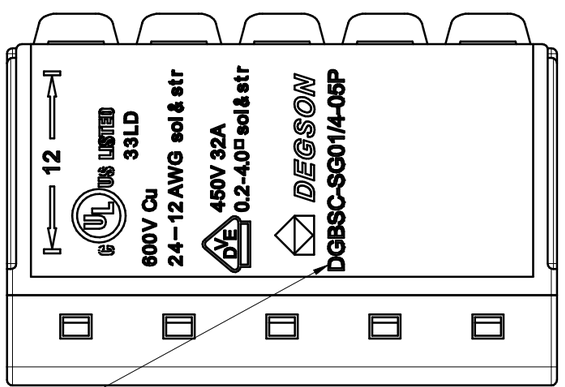

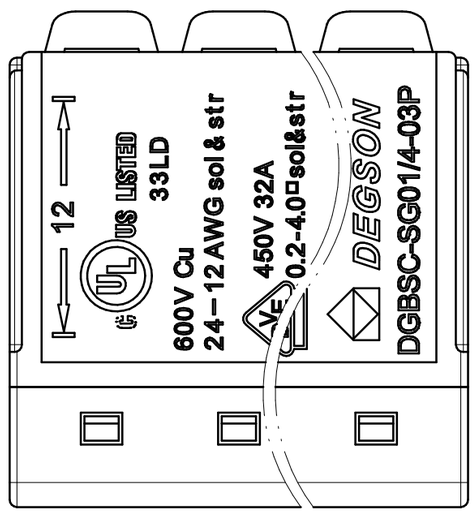

00

未注公差/General tolerances(mm)

0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

UL 标准/UL Standard:			
额定电压/Rated Voltage(V)	600		
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/32	/
工频耐压/Withstanding voltage(V/1Min)	/	AC2500	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~12 / 0.2~4.0		
间距/Pitch(mm)/线数范围/Poles	5.6/N=02P/03P/05P		
剥线长度/Stripping length(mm)	12		
使用温度范围/Operating temperature(℃)	-40~+85（IEC）		
符合RoHS环保要求/Conform to RoHS	Yes		
Mark:DGBSC-SG01/4-02P*：600V Cu 24-12AWG sol&str			

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	Thermoplastic	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

DEGSON

MATERIAL: 材质		SURFACE/COLOR: 表面处理	
MAT NO./REV: 物料编码	/版本	MAT STATUS: 物料状态	
NAME: DGBSC-SG01/4-XXP(17-200ZH)			
APPD: 核准人	核准日期		
CHKD: 审核人	审核日期		
DRFT: 设计人	设计日期		
DRAWING NO. 图号	TYPE 图纸类型	DRAWING STATUS 图纸状态	SCALE 1:1 / SHEET 1/1

A3 (mm/inch)