


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将负担责任。本公司保留对涉及实用、本用新型和外观专利的所有权利。


未注公差/General tolerances(mm)														0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

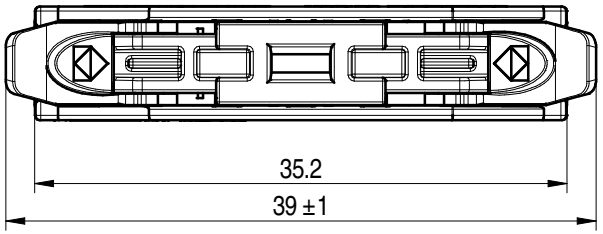


UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12 / 0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)




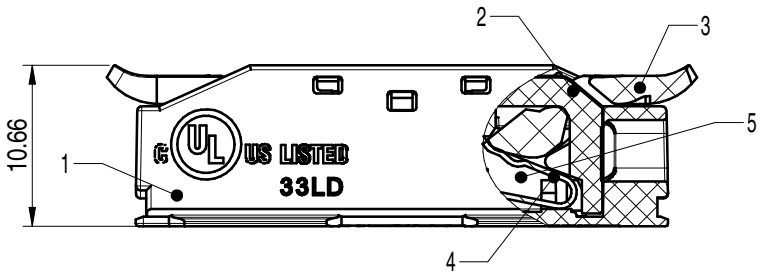



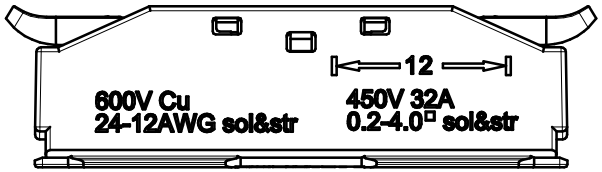





SCAL 1:1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

DEGSON

APPD:	蓝贵凡	2023.06.10
CHKD:	曹利彬	2023.06.10
DRFT:	曹利彬	2023.06.10

A4 mm (inch)

MATERIAL: /　　SURFACE/COLOR: /

MAT NO./REV: -　　/ 00　　MAT STATUS: 批量

NAME: DGBSC-SG02/4-01P (17-00ZH)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200199127	CUSTOMER DRAWING	Work	1:1	1/1