

S CN BN - J 1 1 50 - SO IPM

SUNTSU

CONNECTOR

BNC

Connector Type
Jack







Rows
1

Connectors
per Row
1

Impedance
50

Contact Termination
Solder

Mounting Style
Isolated from
Panel

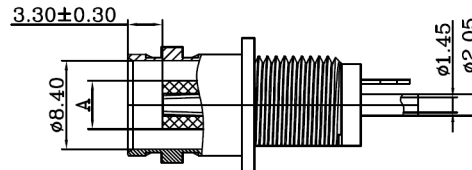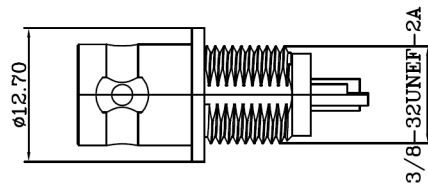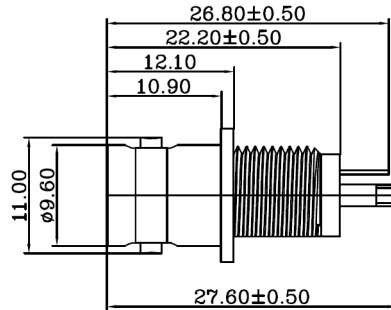

1. Materials:

- a) Body: Zinc Nickel Plated
- b) Contact: Brass Nickel Plated
- c) Insulator: ABS White

2. Normal Impedence: 50Ω

3. Frequency Range: 0-2 GHz

4. Max Peak Voltage: 500V

5. Dielectric Strength: 1500V RMS

6. Insulation Resistance: 5000MΩ/Min



BNC FEMALE ISOLATED FROM PANEL
WITH MOLDED THERMO PLASTIC
INSULATION

Document History

Edits Made	Date	Edited By	Approved By
Initial Release	06/28/2021	B. Gibbons	KH Mun

Part No.	SCNBN-J1150-SOIPM
Scale	Not drawn to scale
Unit	mm

Drawn	B. Gibbons	06/28/2021
Tolerance	0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	
Pages	1/1	