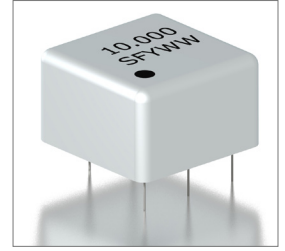
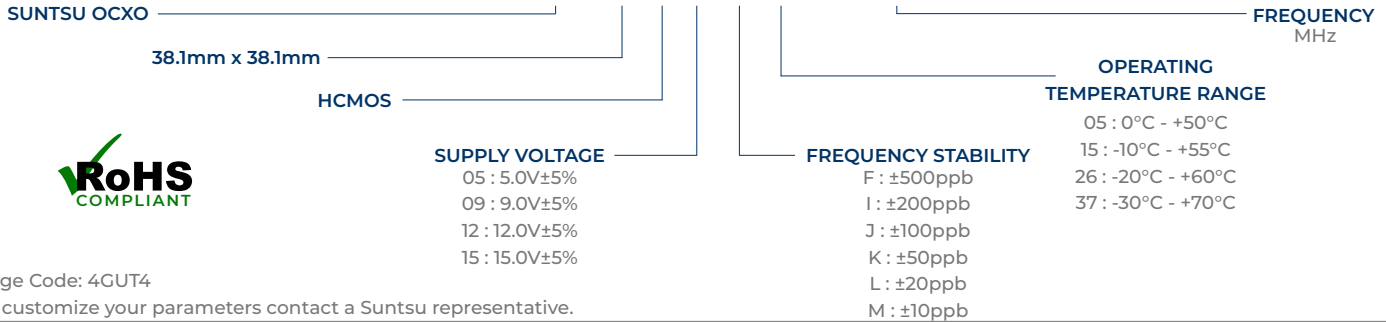


| Features |
|---|
| <ul style="list-style-type: none"> ±10ppb (Frequency Stability) Available HCMOS/TTL OCXO |

| Applications |
|--|
| <ul style="list-style-type: none"> Military Communication Equipment Base Stations Test Equipment Synthesizers Digital Switching |


Part Numbering Guide
SOC 38 C 12 M 37 - 10.000M


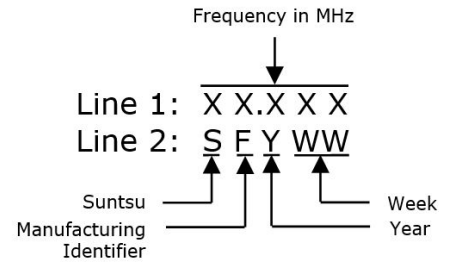
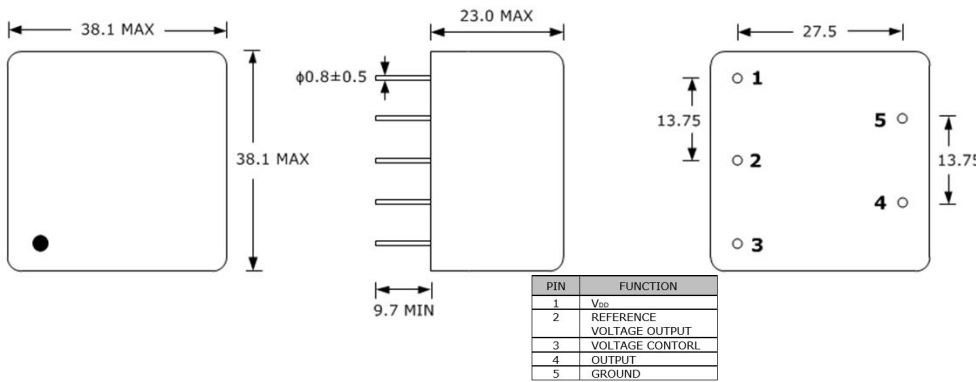
Cage Code: 4GUT4

To customize your parameters contact a Suntsu representative.


| Electrical Parameters | Units | Minimum | Typical | Maximum | Remarks |
|---|-------|---------------------|----------|---------------------|---------------------------------------|
| Frequency Range | MHz | 5 | | 100 | |
| Frequency Tolerance at +25°C | ppb | -100 | | +100 | |
| Freq. Stability vs. Op Temp. | ppb | -10 | | +10 | See part numbering guide for options. |
| Freq. Stability vs. Supply Voltage | ppb | -2 | | +2 | V _{DD} ±5% Change |
| Freq. Stability vs. Load | ppb | -2 | | +2 | ±10% Change |
| Freq. Stability vs. Aging/Year | ppb | -50 | | +50 | See part numbering guide for options. |
| Operating Temperature | °C | -30 | | +70 | See part numbering guide for options. |
| Storage Temperature | °C | -45 | | +85 | |
| Supply Voltage (V _{DD}) - 5.0V Option | V | 4.750 | 5.0 | 5.250 | |
| Supply Voltage (V _{DD}) - 9.0V Option | V | 8.550 | 9.0 | 9.450 | |
| Supply Voltage (V _{DD}) - 12.0V Option | V | 11.400 | 12.0 | 12.600 | |
| Supply Voltage (V _{DD}) - 15.0V Option | V | 14.250 | 15.0 | 15.750 | |
| Power Consumption At Turn On | W | | | 4.5 | |
| Power Consumption At 25°C | W | | | 1.8 | |
| Control Voltage (V _c) | V | 0.0 | | 5.0 | |
| Control Middle Voltage | V | | 2.5 | | |
| Pullability | ppm | ±0.7 | | | |
| Linearity | % | | | 10 | |
| V _c Input Impedance | KΩ | 50 | | | |
| Deviation Slope | | | Positive | | |
| Output Logic (HCMOS) | pF | | | 15 | |
| Output Logic Level - High (V _{OH}) | V | 0.9*V _{DD} | | | |
| Output Logic Level - Low (V _{OL}) | V | | | 0.1*V _{DD} | |
| Rise Time (T _R) And Fall Time (T _F) | ns | | | 5 | |
| Symmetry (Duty Cycle) | % | 45 | 50 | 55 | |
| Warm-Up Time | ppb | -10 | | 10 | At 25°C After 20Mins. |

Outline Drawing & Part Marking


All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.





Test Circuit (HCMOS)

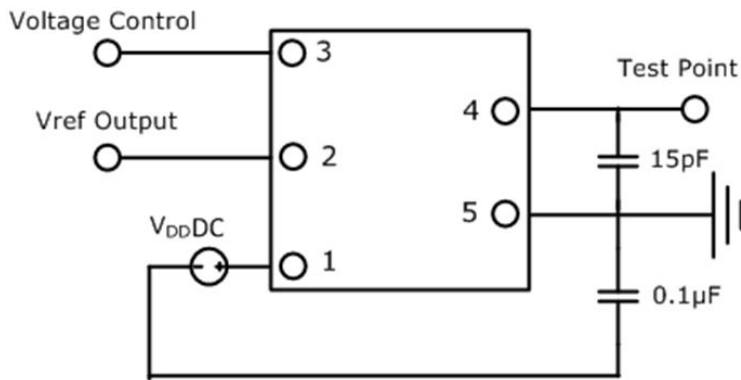

Waveform (HCMOS)

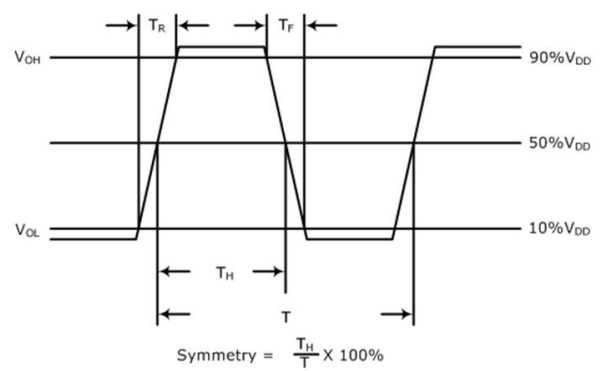

Typical Phase Noise And Jitter Performance (Measured By Agilent E5052A)

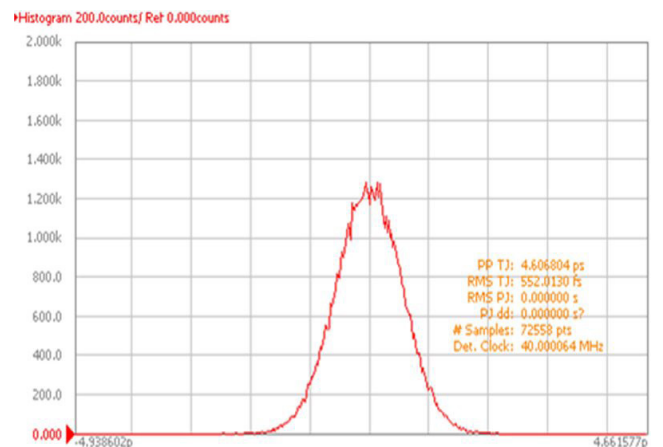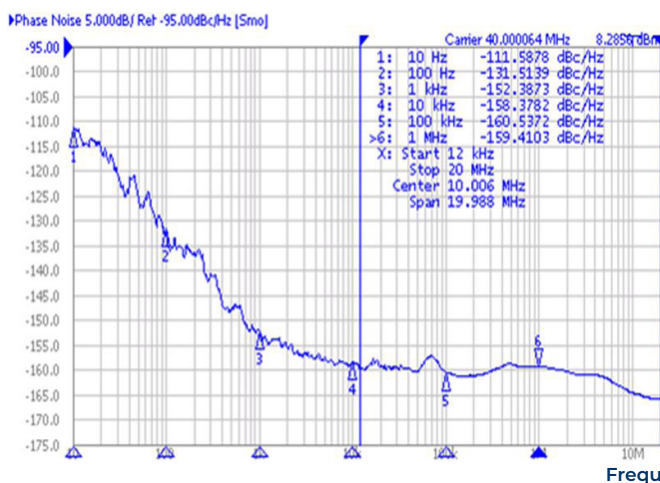

| Environmental Specifications | | Mechanical Specifications | |
|------------------------------|---------------------------------------|------------------------------|---------------------------------------|
| Temperature Cycling | MIL-STD-883, Method 1010, Condition B | Mechanical Shock | MIL-STD-202, Method 213, Condition B |
| Lead Integrity | MIL-STD-883, Method 1014, Condition A | Vibration | MIL-STD-883, Method 2007, Condition A |
| Gross Leak Test | MIL-STD-883, Method 1014, Condition C | Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition A |
| Solderability | MIL-STD-883, Method 2003 | Resistance to Solvents | MIL-STD-202, Method 215 |