


Features
• ± 20 ppm (Frequency Stability) Available
• Wide Frequency Range
• CMOS
• Programmed Oscillator
• Tape and Reel

Applications
• Ethernet (10G/40G/100G)
• Base Stations
• Wi-Fi
• DSL/ADSL
• Communications



Part Numbering Guide

SQG 32 C 3 A 48 1 N - 25.000M

<p>SUNTSU QUICK TURN OSC</p> <p>3.2mm x 2.5mm</p>						
<p>CMOS</p>						
<p>SUPPLY VOLTAGE</p> <p>2 : 2.5V$\pm 5\%$</p> <p>3 : 3.3V$\pm 5\%$</p>						
		<p>FREQUENCY STABILITY</p> <p>A : ± 50ppm</p> <p>B : ± 30ppm</p> <p>C : ± 25ppm</p> <p>*D : ± 20ppm</p>				
			<p>OPERATING TEMPERATURE RANGE</p> <p>07 : 0°C - +70°C</p> <p>16 : -10°C - +60°C</p> <p>17 : -10°C - +70°C</p> <p>27 : -20°C - +70°C</p> <p>38 : -30°C - +85°C</p> <p>48 : -40°C - +85°C</p>			
				<p>TRI-STATE (ENABLE/DISABLE)</p> <p>1 : Pin 1</p> <p>2 : Pin 2</p>		
					<p>FREQUENCY MHz</p> <p>PROGRAMMING MODE</p> <p>BLANK : Fractional Mode</p> <p>N : Integer Mode</p>	

RoHS COMPLIANT

Cage Code : 4GUT4


To customize your parameters, contact a Suntsu representative.

* For Frequency stability option D, contact a Suntsu representative.

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	MHz	8		250	
Frequency Stability (Includes Initial Tolerance at 25°C, Frequency Stability over Operating Temperature, Output Load Change, Supply Voltage Change, and First Year Aging at 25°C.)	ppm	-20		+20	See part numbering guide for options
Operating Temperature	°C	-40		+85	See part numbering guide for options
Storage Temperature	°C	-55		+125	
Supply Voltage (V _{DD}) - 2.5V option	V	2.375	2.5	2.625	
Supply Voltage (V _{DD}) - 3.3V option	V	3.135	3.3	3.465	
Current (I _{DD}) - 2.5V option	mA			35	
Current (I _{DD}) - 3.3V option	mA			40	
Output Load (CMOS)	pF			15	
Output Logic Levels High (V _{OH})	V	0.9*V _{DD}			
Output Logic Levels Low (V _{OL})	V			0.1*V _{DD}	
Rise (TR) and Fall (TF) Time	ns			3	
Symmetry (Duty Cycle)	%	45	50	55	
Tri-State Input Voltage - Enable	V	0.7*V _{DD}			No Connection
Tri-State Input Voltage - Disable	V			0.3*V _{DD}	
Start-Up Time	ms			10	
Phase Jitter (12kHz ~ 20MHz)	ps		0.5	1.5	Fractional Mode
Phase Jitter (12kHz ~ 20MHz)	ps		0.3	0.5	Integer Mode



Outline Drawing & Land Pattern

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.


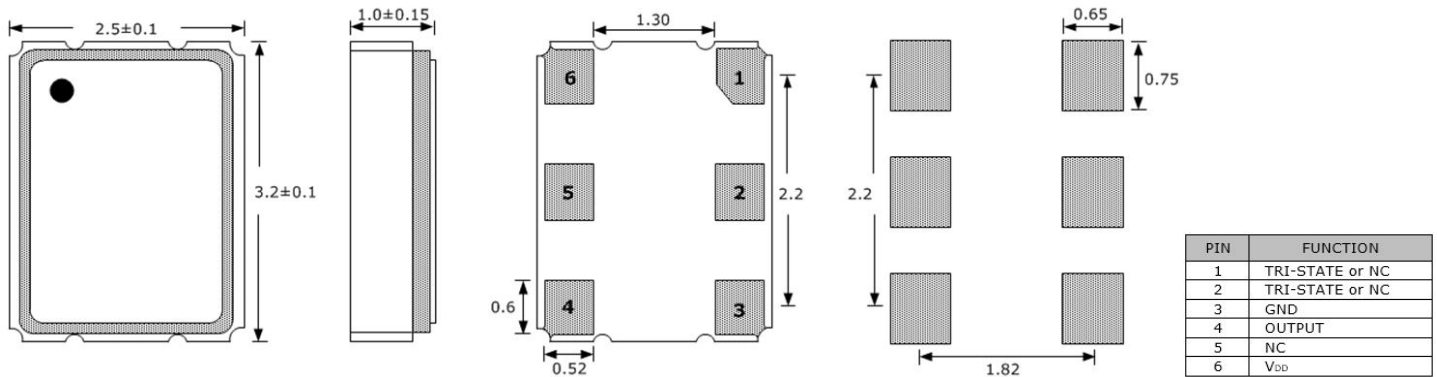


Test Circuit (CMOS)



Waveform (CMOS)

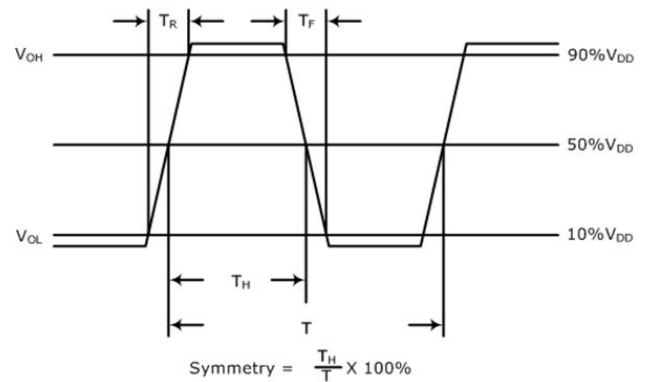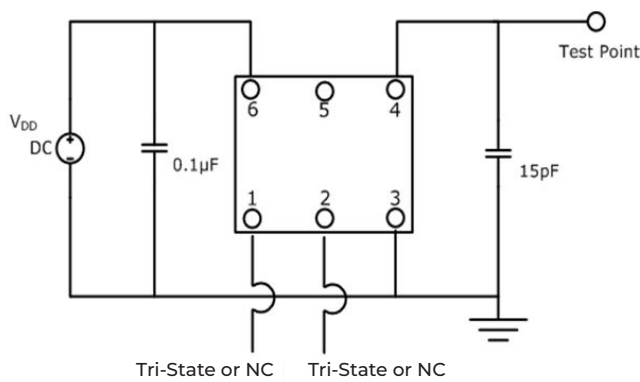


Typical Phase Noise Fractional Performance (Measured By Agilent E5052A)

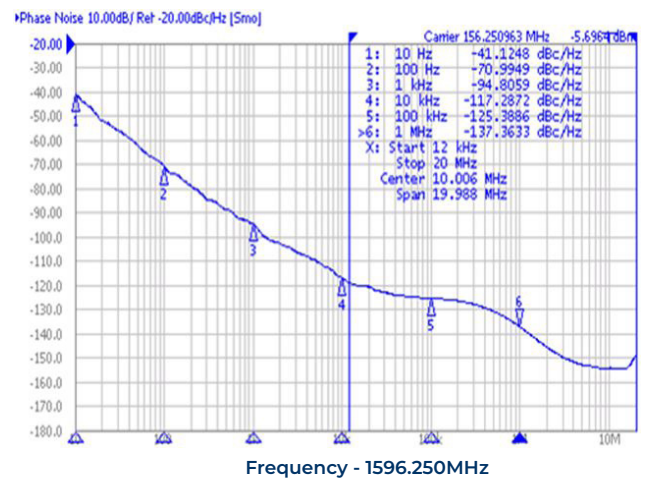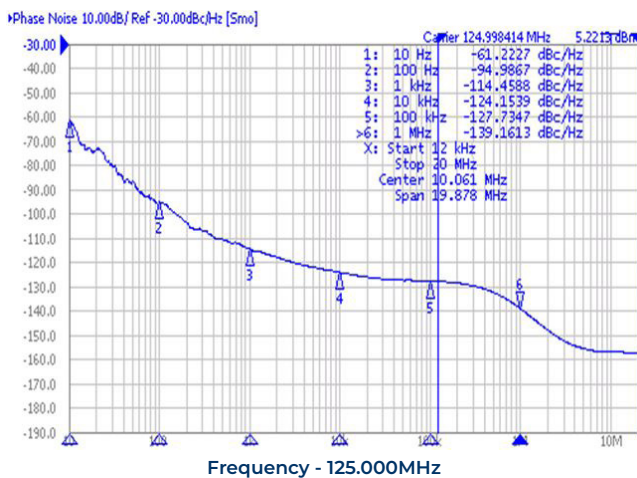


Typical Jitter Fractional Performance (Measured By Agilent E5052A)

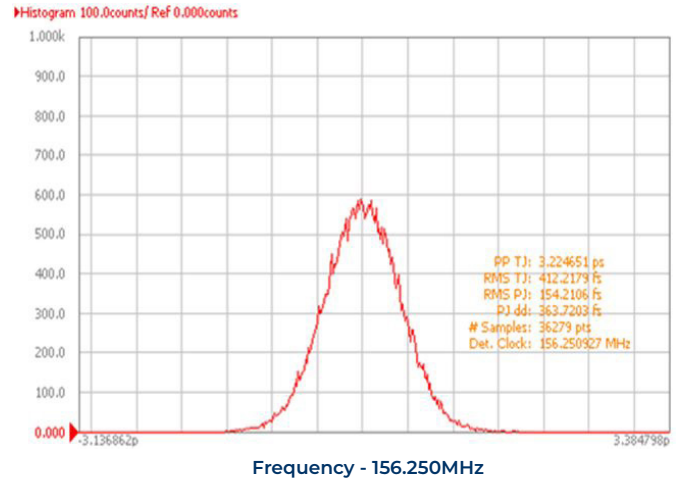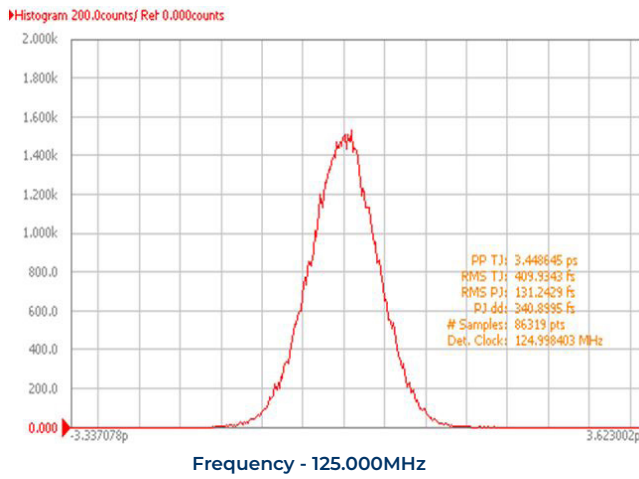

Reflow Profile

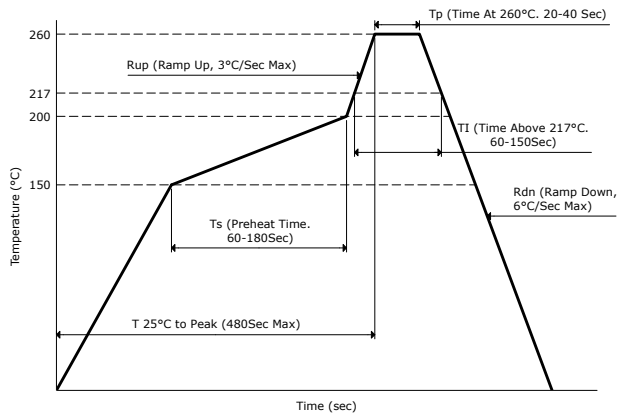


Part Marking

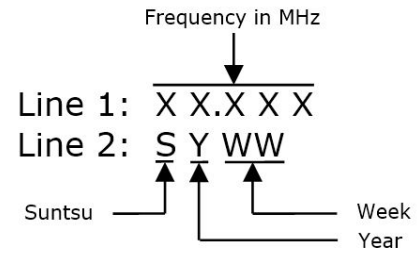

Tape And Reel Dimensions

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

3,000pcs/Reel

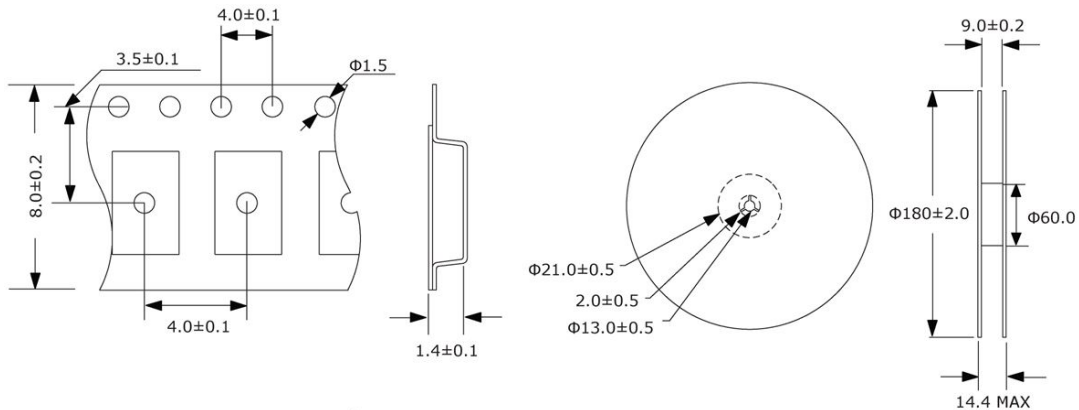

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Moisture Resistance	MIL-STD-883, Method 1004
Solderability	MIL-STD-883, Method 2003	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K