



Features
<ul style="list-style-type: none"> <li>Stratum 3 (Overall <math>\pm 4.6</math>ppm)</li> <li>Clipped Sinewave</li> <li>(VC)TCXO</li> </ul>

Applications
<ul style="list-style-type: none"> <li>Base Stations</li> <li>Stratum 3</li> </ul>

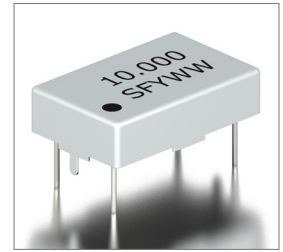


**Part Numbering Guide**

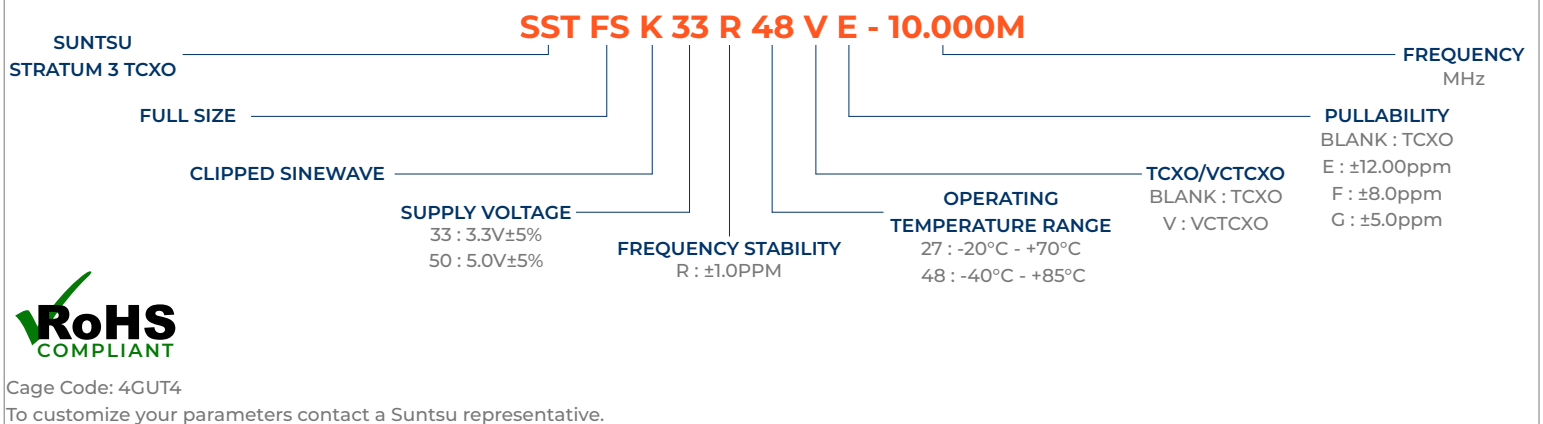


Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	MHz	2		40	
Frequency Tolerance at +25°C	ppm	-0.3		+0.3	
Freq. Stability vs. Op Temp.	ppm	-1.0		+1.0	
Freq. Stability vs. Supply Voltage	ppm	-0.1		+0.1	V <sub>DD</sub> $\pm 5\%$ change.
Freq. Stability vs. Load	ppm	-0.1		+0.1	$\pm 5\%$ change
Freq. Stability vs. Aging	ppm	-1.0		+1.0	1 Year, $\pm 3.1$ ppm for 10 Years
Operating Temperature	°C	-40		+85	See part numbering guide for options.
Storage Temperature	°C	-55		+125	
Supply Voltage (V <sub>DD</sub> ) - 3.3V Option	V	3.135	3.3	3.465	
Supply Voltage (V <sub>DD</sub> ) - 5.0V Option	V	4.750	5.0	5.250	
Current (I <sub>DD</sub> )	mA			20	
Current (VC, VCTCXO) - 3.3V Option	V	0.3		3.0	
Current (VC, VCTCXO) - 5.0V Option	V	0.5		4.5	
Pullability (VCTCXO)	ppm	$\pm 5.0$		$\pm 12.0$	See part numbering guide for options.
Linearity (VCTCXO)	%			20	
Output Load (Clipped Sinewave)	k $\Omega$ //pF			10//10	
Output Logic Levels	V <sub>P-P</sub>	0.8			
Rise (T <sub>R</sub> ) And Fall (T <sub>F</sub> ) Time	ns			10	
Symmetry (Duty Cycle)	%	40	50	60	
Start-Up Time	ms			10	
Frequency Adjustment	ppm	3			
Phase Noise (Typical) 10Hz Offset	dBc/Hz		-80		
Phase Noise (Typical) 100Hz Offset	dBc/Hz		-120		
Phase Noise (Typical) 1KHz Offset	dBc/Hz		-135		
Phase Noise (Typical) 10KHz Offset	dBc/Hz		-140		
Phase Noise (Typical) 100KHz Offset	dBc/Hz		-145		

**Outline Drawing & Part Marking**


All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

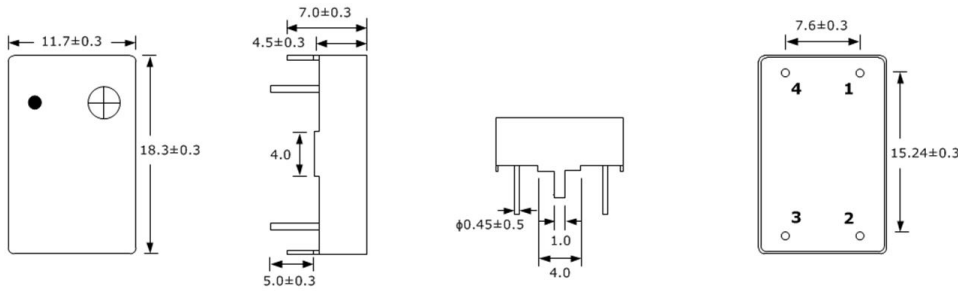


PIN	FUNCTION
1	V <sub>c</sub> (VCTCXO) or NC (TCXO)
2	GND
3	OUTPUT
4	V <sub>DD</sub>

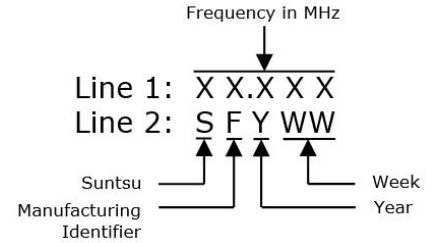


**Test Circuit (Clipped Sinewave)**

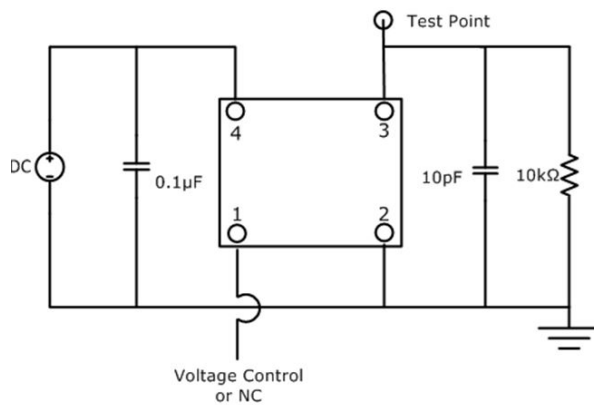


**Waveform (Clipped Sinewave)**

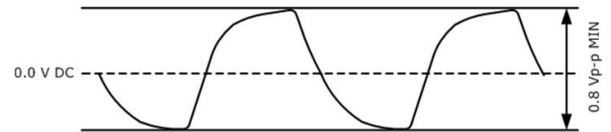

**Typical Phase Noise And Jitter Performance (Measured By Agilent E5052A)**

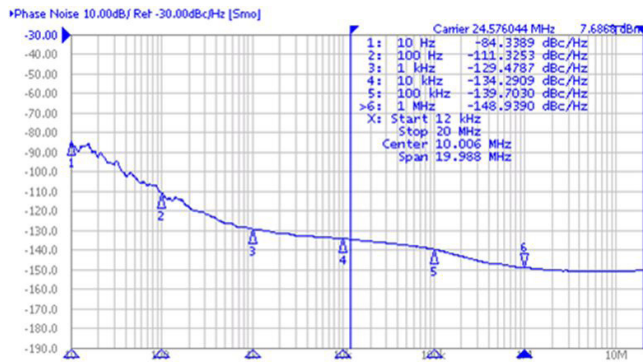

Frequency - 24.576MHz

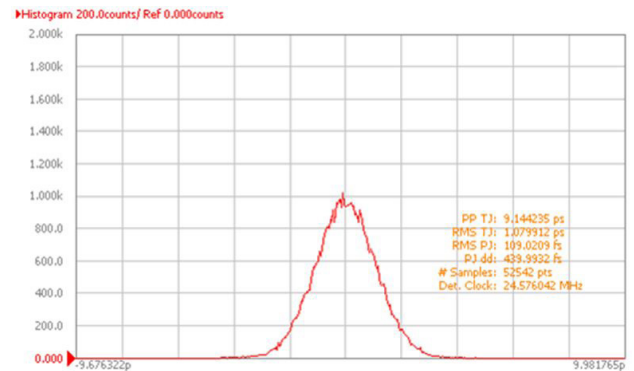

Frequency - 24.576MHz

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Moisture Resistance	MIL-STD-883, Method 1004
Solderability	MIL-STD-883, Method 2003	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K