
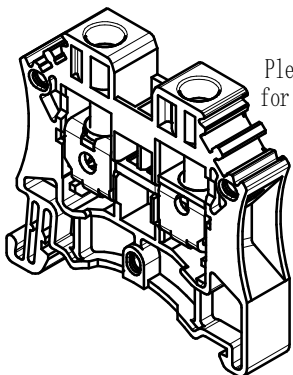
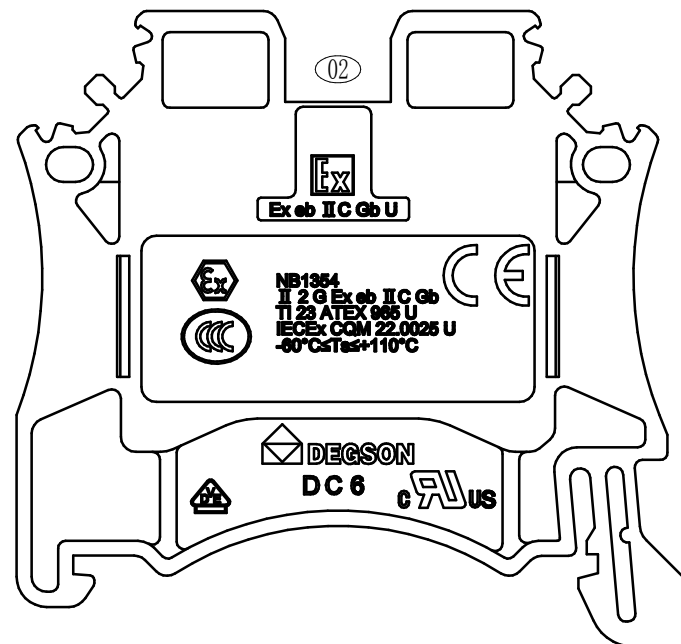


Technical drawing of a rectangular plate. The plate has a central slot with a width of 10 and a height of 10. On either side of the slot, there is a circular hole with a diameter of 10. The total width of the plate is 40, and the total height is 8. The drawing includes dimension lines and numerical values for the slot width (10), slot height (10), hole diameter (10), and total plate height (8).

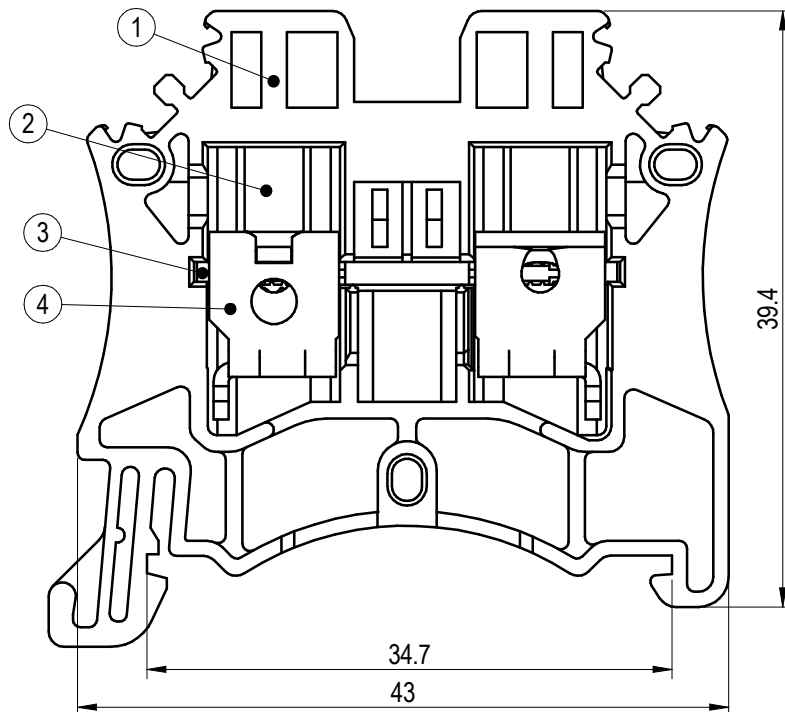

Please refer to the 3D model,
for these unmarked dimensions.

4	Cage	Steel	M4/Zn Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Steel	M4/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

02		Cancel EAC lettering	邓梁	2024.10.18
REV	ECN	DESCRIPTION	DRET	DATE

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/50	/	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N · m/Lb.in)	M4,	1.54/14	
线径范围(硬线和软线)/Wire Range(rigid and flexible)	22~8	0.5~6	
间距/Pitch(mm)/线数范围/Poles		8/01P	
剥线长度/Stripping length(mm)		10~12	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: 11020000542-1 / 00		MAT STATUS: work			
APPD: 李根芳	2024.10.18	NAME			
CHKD: 马恩开	2024.10.18	DC6-01P-11-00L(H)			
DRFT: 邓梁	2024.10.18				
	A4	DRAWING NO. 200115351	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SHEET 2:1
		1/1			